



LUZHONG 山东鲁重机床有限公司 SHANDONG LUZHONG MACHINE TOOL CO.,LTD.



好机床·鲁重造
BEST MACHINE BY LUZHONG

山东鲁重机床有限公司（总部）

国内销售部：0632 5083087

国际销售部：0086 632 5083086

网址：www.luzhongmc.com

微信：luzhongmc

邮箱：info@luzhongmc.com

地址：山东省枣庄市滕州市经济开发区滕阳西路789号

SHANDONG LUZHONG MACHINE TOOL CO.,LTD.（Head Office）

Phone：0086 632 5083086

Website：www.lzcncmachine.com

Email：info@luzhongmc.com

WeChat：luzhongmachine

Address：No.789, Tengyang West Road, Economic Development Zone,
Tengzhou City, Zaozhuang City, Shandong Province, China

鲁重国际有限公司（分部）

地址：香港九龙弥敦道540-544号祥兴大厦11楼

山东鲁重数控机床有限公司（分部）

地址：山东省枣庄市滕州市鲁班大道

LUZHONG INTERNATIONAL CO., LTD. (Branch)

Address：11/F Cheung Hing Building 540-544 Nathan Road Yau Ma Teikl

SHANDONG LUZHONG CNC MACHINE TOOL CO., LTD. (Branch)

Address: Luban Avenue, Tengzhou City, Shandong Province, China.



山东鲁重机床有限公司

SHANDONG LUZHONG MACHINE TOOL CO.,LTD.

LUZHONG

山东鲁重机床有限公司是一家拥有30多年制造经验的大型数控机床生产企业。公司占地面积10万平方米，拥有先进机加设备100多台，精密检测设备50台。先进的生产流程和信息化的车间为生产提供了有力保障。

公司员工200多人，包括30多名高级工程师和100多名高级技能人才，为企业产品创新升级，智能化制造提供了坚实技术保障和生产基石。

主要产品有：数控立式加工中心、数控卧式加工中心、数控龙门加工中心、数控铣床、平床身数控车床、斜床身数控车床、立式数控车床、车床、铣床等，年生产能力达到2500多台，涵盖20多个品种、100多个型号。机器广泛应用于军工航天、汽车、电力IT、工程机械、船舶、石油等行业，并荣获多项奖项和专利。

Shandong Luzhong Machine Tool Co., Ltd. is a large-scale CNC machine tool manufacturer with more than 30 years of manufacturing experience. The company covers an area of 100,000 square meters and has more than 100 sets of outstanding machining equipment and 50 sets of precision testing equipment. Advanced production processes and information-based workshops provide a strong guarantee for production.

The company has more than 200 employees, including more than 30 senior engineers and more than 100 senior skilled personnel, which provides solid technical support as well as production cornerstones for the company's product innovation upgrading and intelligent manufacturing.

The main products are: CNC vertical machining center, CNC horizontal machining center, CNC gantry machining center, CNC milling machine, flat bed CNC lathe, Slant bed CNC lathe, vertical CNC lathe, lathe machine, milling machine, etc. The annual production capacity reaches 2500 Multiple units, covering more than 20 varieties and more than 100 models. The machines are widely used in military aerospace, automobile, power IT, engineering machinery, shipbuilding, petroleum and other industries, also have won many awards and patents.



企业荣誉

Enterprise honor

除了 ISO、WIPO、CE、BV、TUV、SGS，EAC 证书外，我们还可以根据您的要求提供任何其他证书。我们的机器已出口到 150 多个国家和地区，覆盖北美、欧洲、南美、中东、东南亚等。我们致力于拓展全球市场，以长期稳定的合作和发展为战略目标，为客户提供专业的海外技术指导 and 完善的售后服务。

“好机床，鲁重造”。让我们一起合作共赢，以智造赋能未来！

In addition to ISO, WIPO, CE, BV, TUV, SGS, EAC certificates, we can also provide any other certificates according to your requirements. Our machines have been exported to more than 150 countries and regions, covering North America, Europe, South America, the Middle East, Southeast Asia, etc. We are committed to expanding the global market, taking long-term, stable cooperation and development as our strategic goal, and providing customers with professional overseas technical guidance and complete after-sales services.

"Best Machine by LUZHONG". Let us work together for a win-win situation and empower the future with intelligent manufacturing!



ENTERPRISE HONOR



ISO认证
ISO CERTIFICATE

ISO认证
ISO CERTIFICATE

ISO认证
ISO CERTIFICATE

ISO认证
ISO CERTIFICATE

CE认证
CE CERTIFICATE



CE证书
CE CERTIFICATE

CE证书
CE CERTIFICATE

BV证书
BV CERTIFICATE

SGS证书
SGS CERTIFICATE

TUV证书
TUV CERTIFICATE



商标
LOGO CERTIFICATE

WIPO证书
WIPO CERTIFICATE

专利证书
PATENT CERTIFICATE

专利证书
PATENT CERTIFICATE

质检报告
INSPECTION REPORT



ERP认证
ERP CERTIFICATE

PVOC证书
PVOC CERTIFICATE

SONCAP证书
SONCAP CERTIFICATE

校准认证
CALIBRATE CERTIFICATE

漆面认证
LACQUER CERTIFICATE



P1-14
加工中心/数控铣床
Vertical Machining Center
CNC Milling Machine



P15-P22
卧式加工中心
Horizontal Machining Center



P23-P30
龙门加工中心
Gantry Machining Center



P31-P42
五轴加工中心
5 Axis CNC Machining Center



P43-P52
斜身床数控车床
Slant Bed CNC Lathe Machine



P53-P64
平身床数控车床
Flat Bed CNC Lathe Machine



P65-P68
管螺纹数控车床
CNC Pipe Threading
Lathe machine



P69-P80
立式数控车床
CNC Vertical Lathe Machine

TCK6340/TCK6340S
TCK6350

Slant Bed CNC Lathe Machine
数控车床斜身床




标准配置 Standard configuration

- 主軸伺服电机
- 台湾单元 (5000转)
- 台湾丝杠
- 台湾线轨
- 国产滚珠丝杆
- 排刀座
- 液压夹头
- Servo main motor
- 140mm spindle units (3500 RPM)
- Taiwan linear rails
- Ball screw
- Gang type
- Hydraulic collet

可选配置 Optional configuration

- 台湾单元 (5000转)
- 台湾丝杠
- 6/8工位电动刀塔
- 8/12工位液压刀塔
- 液压卡盘
- 排屑器
- Taiwan spindle units(5000 RPM)
- Taiwan ball screw
- Electric turret 6/8 position
- Hydraulic turret 8/12 position
- Hydraulic chuck
- Chip conveyor

SLANT BED CNC LATHE MACHINE

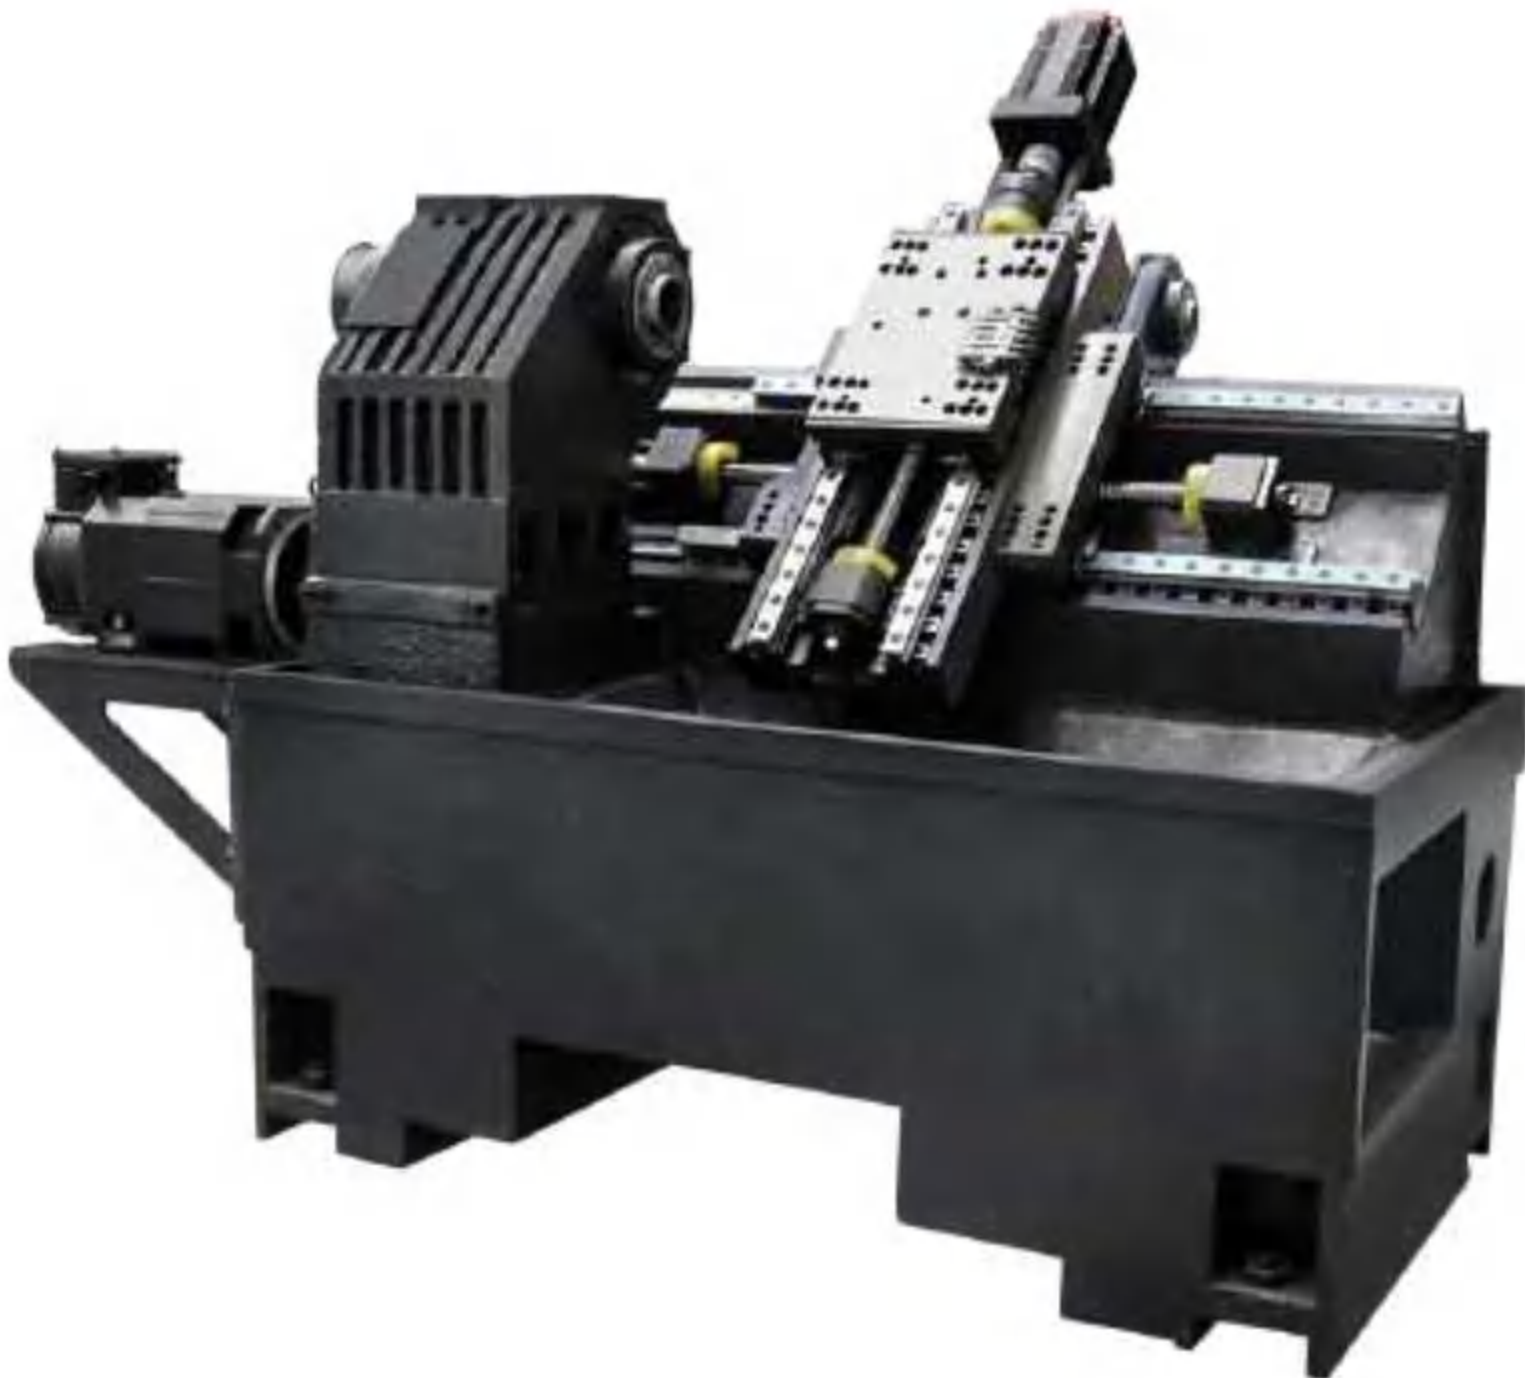

主要性能特点 Main features

- 45° 斜床身
- 高精度台湾线轨
- 排屑量大且方便
- 主轴单元为重切削式和高速两种
- 丝杠预拉伸加工
- 排刀架
- 可选配刀塔
- 45 degree slant bed
- High accuracy Taiwan linear guideways
- Chip conveying capacity is large and convenient
- Spindle unit has two types: heavy-duty cutting type and high-speed type
- Screw pre-stretching structure
- Gang type tool post
- Optional turret

SPECIFICATIONS		Units	TCK6340	TCK6340S	TCK6350
床身上最大回转直径	Swing over bed	mm	400	400	520
横滑板上最大回转直径	Swing over cross slide	mm	140	140	220
最大工件长度	Max. workpiece length	mm	180	390(刀塔Turret 300)	410(刀塔Turret 330)
主軸孔径	Spindle bore	mm	48(选配Opt. 56)	48(选配Opt. 56)	66
主軸端部形式	Spindle nose type	-	A2-5	A2-5	A2-6
主軸转速级数	Spindle speed steps	-	无级Stepless	无级Stepless	无级Stepless
主軸转速范围	Spindle speed range	rpm	3500	3500	3000
刀架类型	Turret/tool post	-	排刀Gang type	排刀Gang type (选配Opt. 刀塔Turret)	
刀具尺寸	Tool size	mm	20*20	20*20	25*25
X轴行程	X axis travel	mm	400	400	500
Z轴行程	Z axis travel	mm	300	400	500
X轴快速进给速度	X axis rapid traverse	mm/min	24000	24000	24000
Z轴快速进给速度	Z axis rapid traverse	mm/min	24000	24000	24000
主电机功率	Main motor power	kw	5.5	5.5	7.5
导轨形式	Guide rail type	-	线轨Linear rail	线轨Linear rail	线轨Linear rail
机床重量	Machine weight	kg	2300	2600	3000
外形尺寸(长×宽×高)	Overall dimension(L*W*H)	mm	2200*1530*1780	2390*1530*1780	2500*1620*1890

TCK36A/TCK46A/TCK50A

Slant Bed CNC Lathe Machine
数控车床斜身床



标准配置 Standard configuration

- 主軸伺服电机
 - 国产主軸单元
 - 台湾线轨
 - 国产滚珠丝杆
- Servo main motor
 - Spindle units
 - Taiwan linear rails
 - Ball screw
- 液压卡盘
 - 液压刀塔
 - 液压尾座
- Hydraulic chuck
 - Hydraulic turret
 - Hydraulic tailstock

SLANT BED CNC LATHE MACHINE




光机介绍 Bare engine instruction

- 高精度台湾直线导轨
- 高速主軸单元
- 高强度铸铁
- 自动集中润滑
- 整体斜床身
- Higher accuracy Taiwan linear guideways
- Higher speed spindle unit
- Higher rigidity castings
- Integrated automatic lubrication
- One-piece Casting and slant bed

SPECIFICATIONS		Units	TCK36A	TCK46A	TCK50A
床身上最大回转直径	Swing over bed	mm	360	460	500
横滑板上最大回转直径	Swing over cross slide	mm	140	170	250
最大工件长度	Max. workpiece length	mm	300	350	350/500
主軸孔径	Spindle bore	mm	56	56	66
棒料通孔直径	Bar capacity	mm	44	44	55
主軸端部形式	Spindle nose type	-	A2-5	A2-5	A2-6
主軸转速级数	Spindle speed steps	-	无级Stepless	无级Stepless	无级Stepless
主軸转速范围	Spindle speed range	rpm	4000	3500	3000
刀架类型	Turret/tool post	-	8寸液压刀塔 Hydraulic turret 8position		
刀具尺寸	Tool size	mm	20*20	25*25	25*25
X轴行程	X axis travel	mm	185	240	240
Z轴行程	Z axis travel	mm	350	400	350/500
X轴快速进给速度	X axis rapid traverse	mm/min	24000	24000	18000
Z轴快速进给速度	Z axis rapid traverse	mm/min	24000	24000	18000
主电机功率	Main motor power	kw	5.5	7.5	11
尾座套筒直径	Tailstock quill diameter	mm	65	70	70
尾座套筒锥度	Tailstock quill taper	-	MT4	MT5	MT5
尾座套筒行程	Tailstock quill travel	mm	60	80	80
导轨形式	Guide rail type	-	斜床身线轨 Slant bed linear rail		
机床重量	Machine weight	kg	2400	2600	3100/3300
外形尺寸(长×宽×高)	Overall dimension(L*W*H)	mm	2200*1600*1850	2500*1950*1950	2600/2700*2000*2000

TCK56/TCK63/TCK80

Slant Bed CNC Lathe Machine
数控车床斜身床

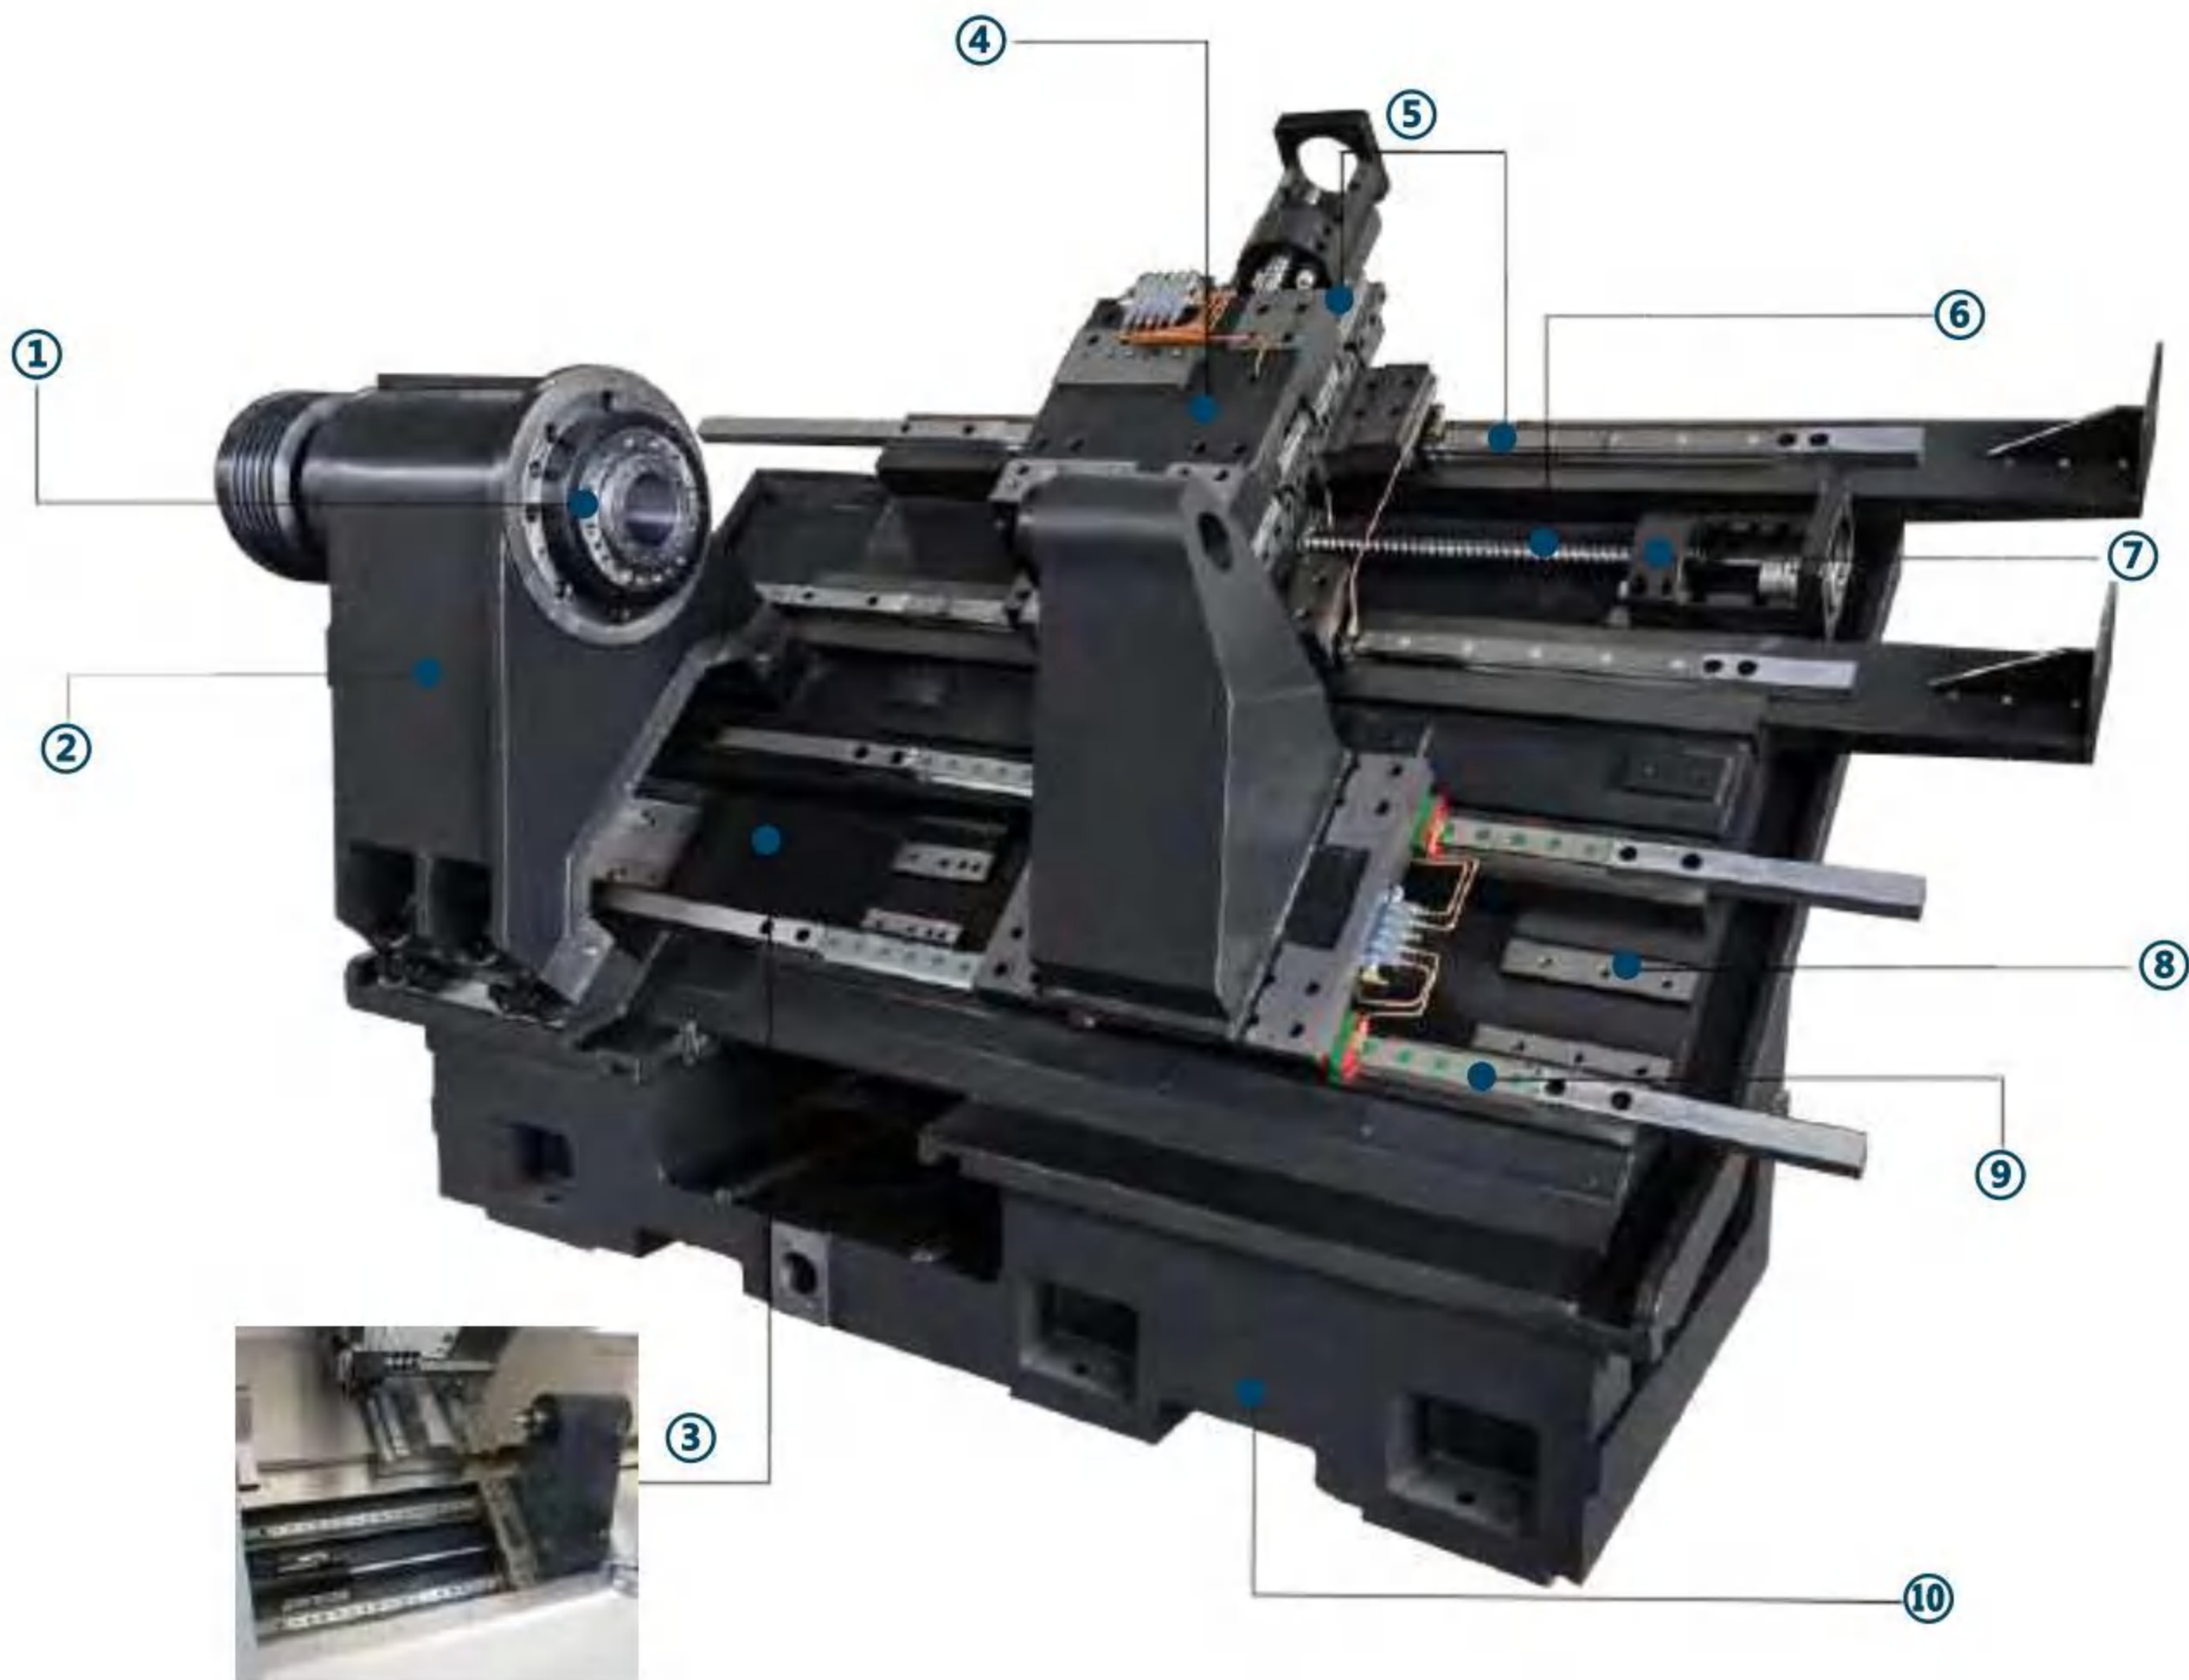

光机介绍 Bare engine instruction

- ① 高速主轴单元，搭配中空液压卡盘和油缸
High-speed spindle unit, with hollow hydraulic chuck and cylinder

② 高刚性床头箱
High rigidity spindle box

③ 标配液压移动尾座
Standard with hydraulically moved tailstock
- ④ 标配8工位伺服刀塔，可选12工位伺服刀塔
Standard with 8-station servo turret optional: 12 station servo turret

⑤ X/Z轴均采用台湾线轨，63/80可选配硬轨
X/Z axis adopts taiwan linear rails, Optional : Hard guideway

⑥ 采用台湾/南京滚珠丝杠
Using taiwan / Nanjing ball screw
- ⑦ 采用SKF/NACHI进口丝杆轴承
Adopt SKF/NACHI imported brand screw rod

⑧ 可选配伺服电机驱动编程尾座
Optional with programmable tailstock driven by servo motor

⑨ 尾座移动采用台湾滚柱线轨，63/80可选配硬轨
Tailstock movement adopts taiwan roller linear rails, Optional : Hard guideway

⑩ 45°整体斜身床结构
45° integral slant bed structure


SLANT BED CNC LATHE MACHINE



SPECIFICATIONS	Units	TCK56	TCK63	TCK80
床身上最大回转直径 Swing over bed	mm	560	720	800
最大工件长度 Max. workpiece length	mm	500 /1000	1000 /1500 /2000 /3000	1000/1500/2000/3000
最大切削直径 Max. cutting diameter	mm	350	500	600
主轴孔径 Spindle bore	mm	65	80	80
主轴端部形式 Spindle nose type	-	A2-6 (可选A2-8)	A2-8	A2-11
主轴转速级数 Spindle speed steps	-	无级Stepless	无级Stepless	无级Stepless
主轴转速范围 Spindle speed range	rpm	50-4500	50-3500	50-3500
卡盘规格 Chuck	-	8寸中空液压卡盘 8" Hollow hydraulic chuck	10寸中空液压卡盘 10" Hollow hydraulic chuck	12寸中空液压卡盘 12" Hollow hydraulic chuck
刀架类型 Turret/tool post	-	8工位伺服刀塔 Servo turret 8 position	12工位伺服刀塔 Servo turret 12position	12工位伺服刀塔 Servo turret 12 position
X轴行程 X axis travel	mm	200	250	250
Z轴行程 Z axis travel	mm	550/1050	1020/1520/2050/3050	1020/1520/2050/3050
X轴快速进给速度 X axis rapid traverse	mm/min	30	12	12
Z轴快速进给速度 Z axis rapid traverse	mm/min	30	16	16
主电机功率 Main motor power	kw	11/15	15/18.5	18.5/22
尾座套筒锥度 Tailstock quill taper	-	MT4 (Opt.MT5)	MT5	MT6
尾座体行程 Tailstock base travel	mm	400/900	900/1400/1900/2900	900/1400/1950/2950
导轨形式 Guide rail type	-	45°斜床身线轨 45°Slant bed linear rail		
机床重量 Machine weight	kg	3700/4500	5000/6000/7000/9000	6000/7000/8000/10000

TCK56Y/TCK63Y/TCK80Y

Slant Bed CNC Lathe Machine
数控车床斜身床

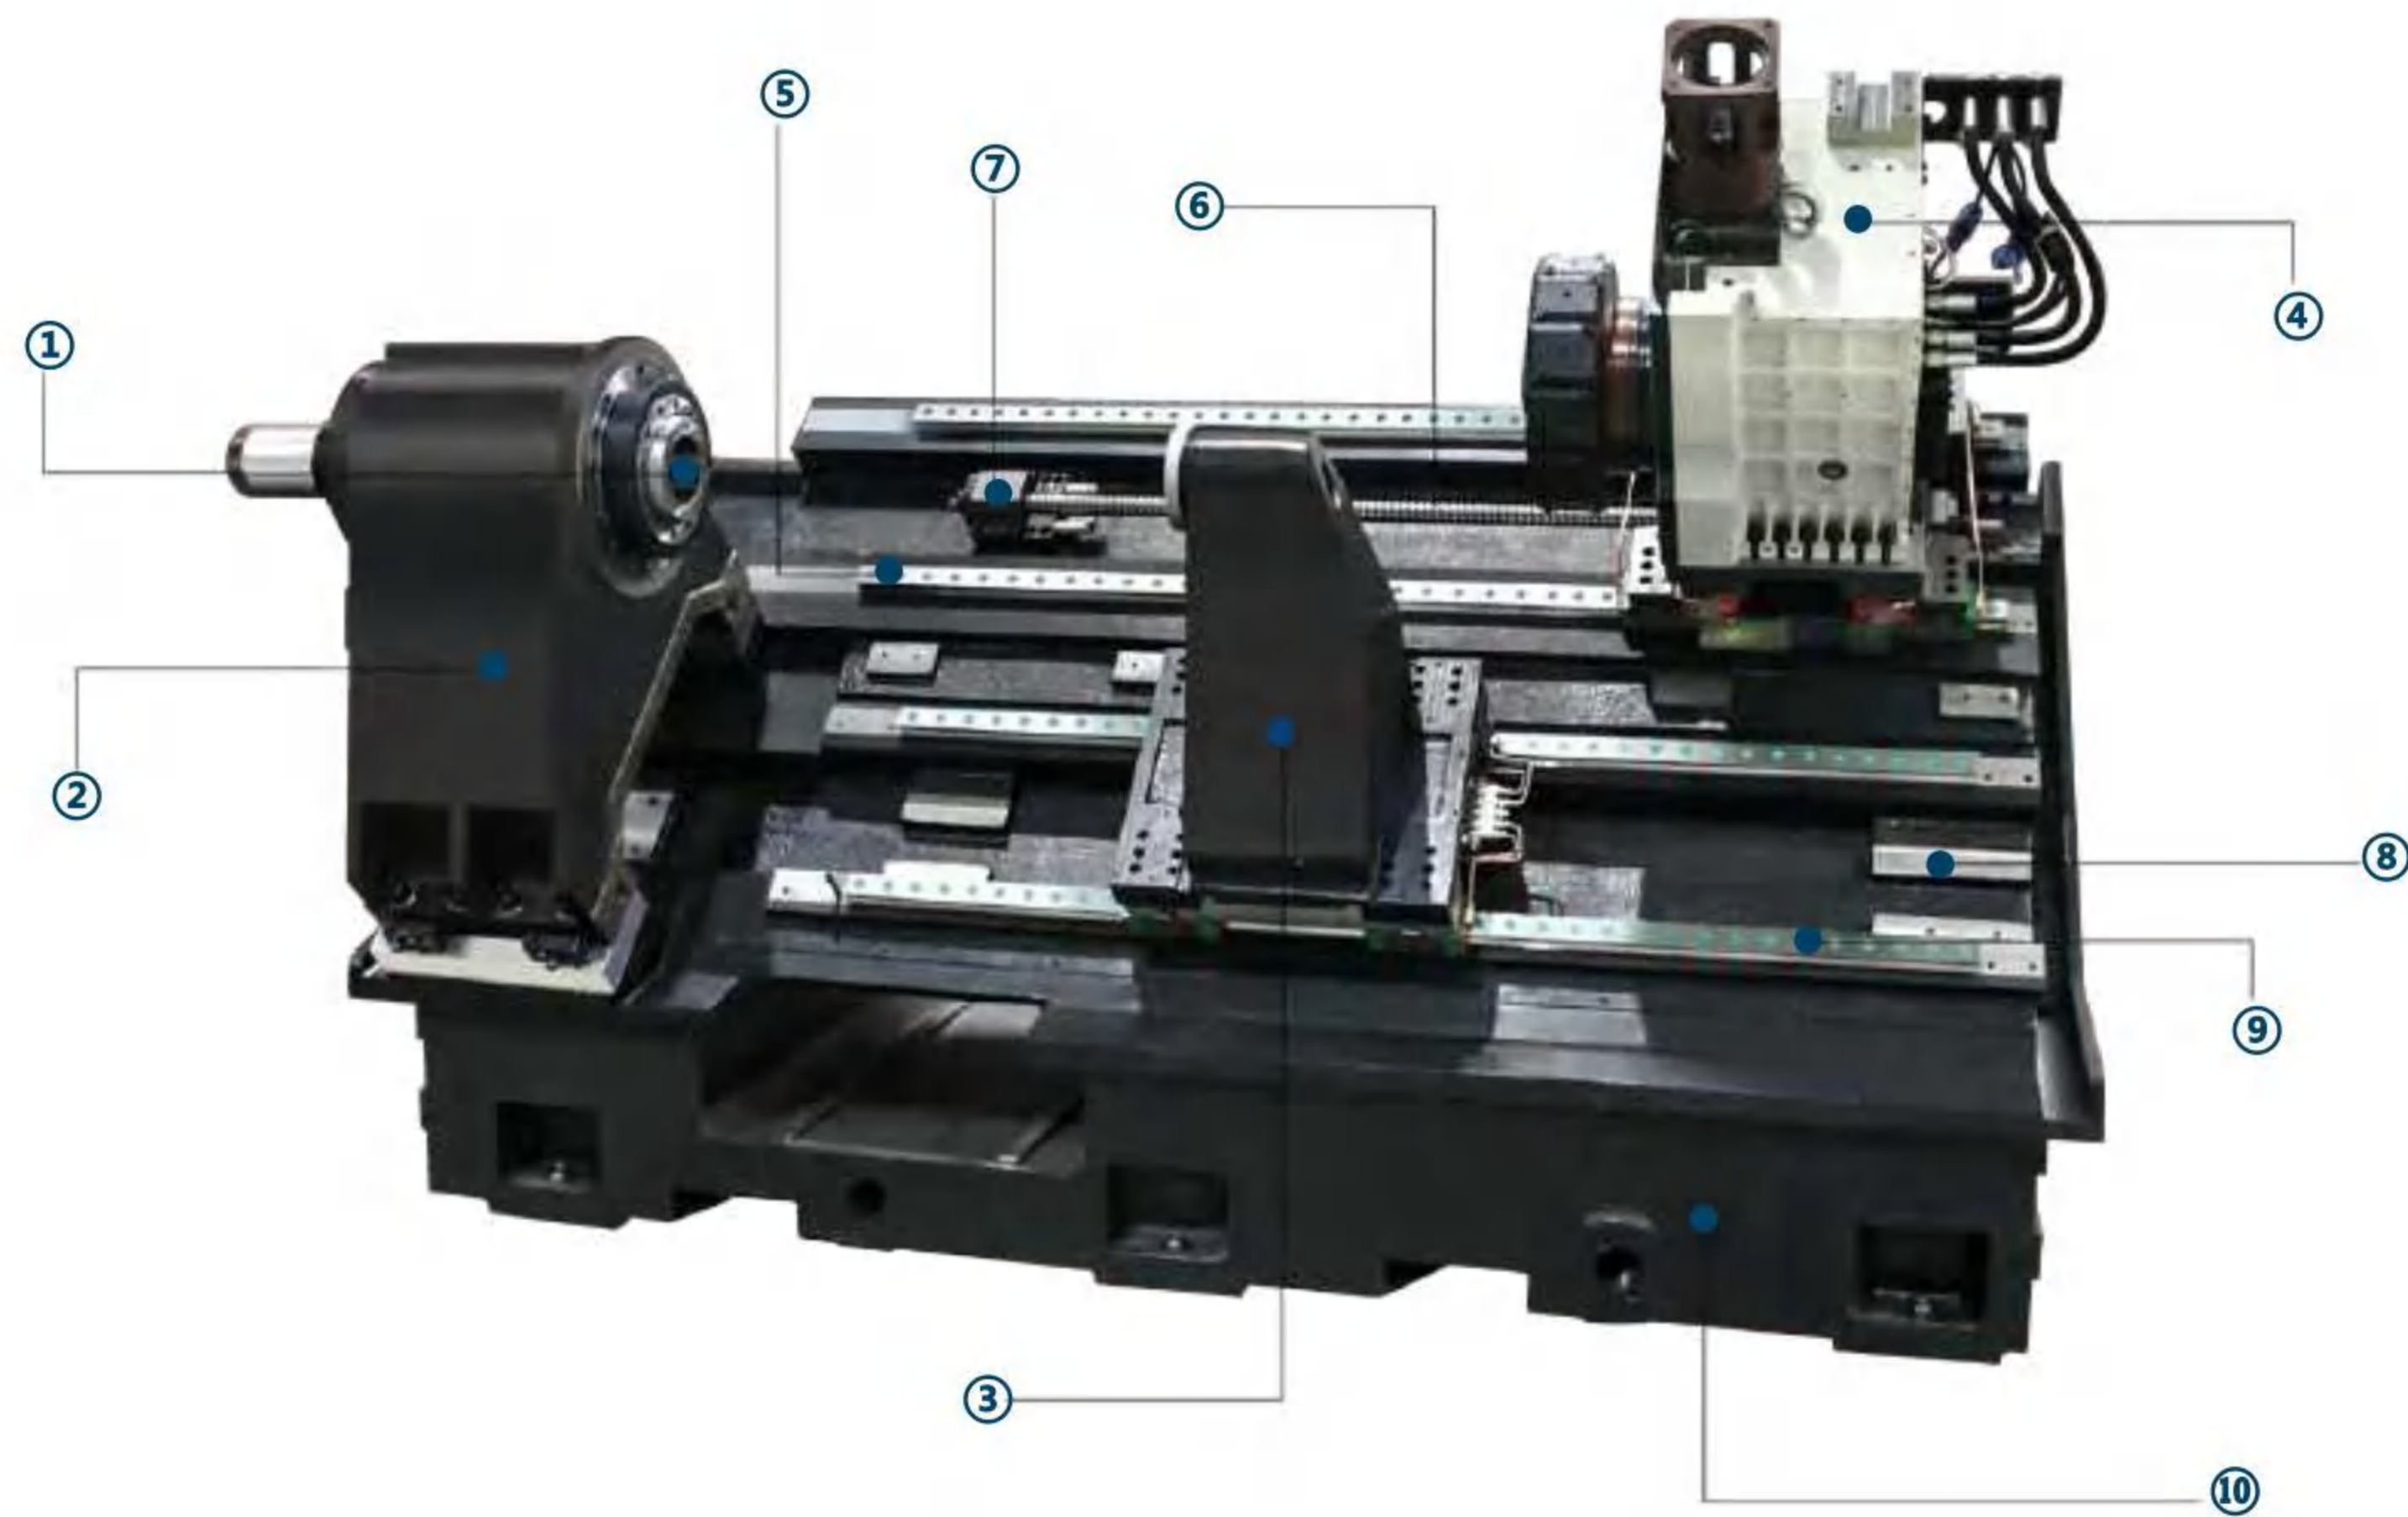

光机介绍 Bare engine instruction

- ① 高速主轴单元，搭配中空液压卡盘和油缸
High-speed spindle unit, with hollow hydraulic chuck and cylinder

② 高刚性床头箱
High rigidity spindle box

③ 标配液压移动尾座
Standard with hydraulically moved tailstock
- ④ 标配Y轴12工位动力刀塔
Standard: 12 station power turret with Y axis

⑤ X/Z轴均采用台湾线轨，63/80可选配硬轨
X/Z axis adopts taiwan linear rails, Optional : Hard guideway

⑥ 采用台湾/南京滚珠丝杠
Using taiwan / Nanjing ball screw
- ⑦ 采用进口丝杆轴承
Adopt imported brand screw rod

⑧ 可选配伺服电机驱动编程尾座
Optional with programmable tailstock driven by servo motor

⑨ 尾座移动采用台湾滚柱线轨，63/80可选配硬轨
Tailstock movement adopts taiwan roller linear rails, Optional : Hard guideway

⑩ 45°整体斜身床结构
45° integral slant bed structure

SLANT BED CNC LATHE MACHINE



SPECIFICATIONS	Units	TCK56Y	TCK63Y	TCK80Y
床身上最大回转直径 Swing over bed	mm	560	720	800
最大工件长度 Max. workpiece length	mm	500/1000	1000/1500/2000/3000	1000/1500/2000/3000
最大切削直径 Max. cutting diameter	mm	310	500	600
主轴孔径 Spindle bore	mm	65	80	80
主轴端部形式 Spindle nose type	-	A2-6 (Opt.A2-8)	A2-11 (A2-8)	A2-11 (A2-8)
主轴转速级数 Spindle speed steps	-	无级Stepless	无级Stepless	无级Stepless
主轴转速范围 Spindle speed range	rpm	50-4500	2000 (3000)	2000 (3000)
卡盘规格 Chuck	-	8寸中空液压卡盘 (可选10寸) 8" Hollow hydraulic chuck (Opt. 10")	12寸中空液压卡盘 12" Hollow hydraulic chuck	12寸中空液压卡盘 12" Hollow hydraulic chuck
X轴行程 X axis travel	mm	200	300	350
Y轴行程 Y axis travel	mm	±50	±50	±50
Z轴行程 Z axis travel	mm	450/900	900/1400/1900/2900	900/1400/1900/2900
X轴快速进给速度 X axis rapid traverse	mm/min	30	12	12
Y轴快速进给速度 Y axis rapid traverse	mm/min	12	12	12
Z轴快速进给速度 Z axis rapid traverse	mm/min	30	16	16
主电机功率 Main motor power	kw	11/15	15/18.5 (Opt.37)	18.5 (Opt.37)
刀架形式 Turret type	12工位动力刀塔 12 Station power turret			
刀架规格 Turret Model		BMT45-ER25	BMT55-ER32	BMT65-ER32
尾座套筒锥度 Tailstock quill taper	-	MT4 (Opt.MT5)	MT5	MT6
尾座体行程 Tailstock base travel	mm	400/900	900/1400/1900/2900	900/1400/1900/2900
导轨形式 Guide rail type	-	斜床身线轨 Slant bed linear rail	斜床身线轨/硬轨 Slant bed linear rail/Hard guideway	
机床重量 Machine weight	kg	4800/6500	6000/7000/8000/10000	7000/8000/9000/11000

TCK600SY

Slant Bed CNC Lathe Machine
数控车床斜身床



SPECIFICATIONS		Units	TCK600SY/500	TCK600SY/1000	
床身上最大回转直径		Swing over bed	mm	600	600
最大工件长度		Max. workpiece length	mm	500	1000
最大切削直径		Max. cutting diameter	mm	460	460
第一 1st spindle	主轴类型	Spindle type	/	Electrical spindle	Electrical spindle
	主轴端部形式	Spindle nose type	/	A2-6	A2-6
	主轴孔直径	Spindle bore	mm	65	65
	主轴转速	Spindle speed	rpm	4500	4500
	主轴电机功率	Spindle motor power	kw	30	30
第二 2ed Spindle	主轴类型	Spindle type	/	Electrical spindle	Electrical spindle
	主轴端部形式	Spindle nose type	/	A2-5	A2-5
	主轴孔直径	Spindle hole diameter	mm	56	56
	主轴转速	Spindle speed	rpm	4500	4500
	主轴电机功率	Main motor power	kw	11	11
第一主轴卡盘端面到 第二主轴卡盘端面距离		The distance from the end face of the first spindle chuck to the end face of the second spindle chuck	mm	50-600	50-1000
X轴行程		X axis travel	mm	280	280
Y轴行程		Y axis travel	mm	±50	±50
Z轴行程		Z axis travel	mm	550	550
C轴行程		C axis travel	°	360°	360°
X/Y/Z快速移动		X/Y/Z axis rapid traverse	m/min.	30/30/10	30/30/10
刀架形式		Tool holder type	/	12 position live turret	12 position live turret
刀架规格		Tool holder specifications	/	BMT55-ER32	BMT55-ER32
机床重量		Machine weight	kgs	5500	7000

SLANT BED CNC LATHE MACHINE

TCK2100LY/ TCK3100LY

Slant Bed CNC Lathe Machine
数控车床斜身床



● 插补Y轴
Interpolated Y-axis

SPECIFICATIONS		Units	TCK2100LY	TCK3100LY
床身最大回转直径	Max. Swing diameter	Mm	650	750
最大切削长度	Max.cutting length	mm	500	1000
最大切削直径	Max. cutting diameter	Mm	350	500
主轴端部形式	Spindle nose type	/	A2-6	A2-8
主轴孔直径	Spindle bore	Mm	65	85
主轴转速	Spindle speed	RPM	4500	3000
X轴行程	X axis travel	Mm	260	400
Y轴行程	Y axis travel	Mm	+50/-70	+100/-100
Z轴行程	Z axis travel	Mm	360	850
主轴电机功率	Main motor power	Kw	30	37
主轴转速级别	Spindle speed steps	R/min	variable speed	variable speed
X/Y/Z快速移动	X/Y/Z axis rapid traverse	m/min	12/12/16	12/12/16
刀架形式	Tool holder type	/	12 position live turret	12 position live turret
机床重量	Machine weight	kg	5000	6500

CK6120/CK6125

Flat Bed CNC Lathe Machine
数控车床平身床



SPECIFICATIONS		Units	CK6120	CK6125
床身上最大回转直径	Swing over bed	mm	190	230
横滑板上最大回转直径	Swing over cross slide	mm	80	125
最大工件长度	Distance between centers	mm	200	200
主轴孔径	Spindle bore	mm	37	50
主轴孔径锥度	Spindle bore taper	-	MT5	MT5
主轴端部形式	Spindle nose type	-	A2-4	A2-5
主轴转速级数	Spindle speed steps	-	无级Stepless	无级Stepless
主轴转速范围	Spindle speed range	rpm	150-2500	150-2500
刀架类型	Turret/tool post	-	排刀Gang type	排刀Gang type
刀具尺寸	Tool size	mm	16*16	16*16
X轴行程	X axis travel	mm	300	300
Z轴行程	Z axis travel	mm	320	320
X轴快速进给速度	X axis rapid traverse	mm/min	8000	8000
Z轴快速进给速度	Z axis rapid traverse	mm/min	10000	10000
尾座套筒直径	Tailstock quill diameter	mm	45	45
尾座套筒锥度	Tailstock quill taper	-	MT4	MT4
尾座套筒行程	Tailstock quill travel	mm	50	50
主电机功率	Main motor power	kw	3	3
冷却电机功率	Coolant motor power	kw	0.09	0.09
机床重量	Machine weight	kg	800	850
外形尺寸(长×宽×高)	Overall dimension(L*W*H)	mm	1500*1100*1650	1500*1100*1650

FLAT BED CNC LATHE MACHINE

CK6130/CK6132
CQK6136

Flat Bed CNC Lathe Machine
数控车床平身床



SPECIFICATIONS		Units	CK6130	CK6132	CQK6136
床身上最大回转直径	Swing over bed	mm	300	320	360
横滑板上最大回转直径	Swing over cross slide	mm	100	110	150
最大工件长度	Distance between centers	mm	500/700	500/700	500/700
主轴孔径	Spindle bore	mm	60	60	60
主轴孔径锥度	Spindle bore taper	-	MT6	MT6	MT6
主轴端部形式	Spindle nose type	-	A2-5	A2-5	A2-5
主轴转速级数	Spindle speed steps	-	无级Stepless	无级Stepless	无级Stepless
主轴转速范围	Spindle speed range	rpm	100-2000	100-2000	100-2000
刀架类型	Turret/tool post	-	Electric 4 position	Electric 4 position	Electric 4 position
刀具尺寸	Tool size	mm	20*20	20*20	20*20
X轴行程	X axis travel	mm	160	170	180
Z轴行程	Z axis travel	mm	500/700	500/700	500/700
X轴快速进给速度	X axis rapid traverse	mm/min	6000	6000	6000
Z轴快速进给速度	Z axis rapid traverse	mm/min	8000	8000	8000
尾座套筒直径	Tailstock quill diameter	mm	50	50	50
尾座套筒锥度	Tailstock quill taper	-	MT4	MT4	MT4
尾座套筒行程	Tailstock quill travel	mm	90	90	90
主电机功率	Main motor power	kw	4	4	4
冷却电机功率	Coolant motor power	kw	0.09	0.09	0.09
机床重量	Machine weight	kg	1150	1200	1250
外形尺寸(长×宽×高)	Overall dimension(L*W*H)	mm	1900*1200*1700	1900*1200*1700	1900/2100*1200*1700

CK6136/CK6140/CK6150
CK6160

Flat Bed CNC Lathe Machine
数控车床平身床



标准配置 Standard configuration

- 4工位电动刀架
- 手动三爪卡盘
- 主轴通孔52mm
- 无级变速
- Electric turret 4 position
- 3-jaw manual chuck
- Spindle bore 52mm
- Stepless speed

可选配置 Optional configuration

- 液压卡盘
- 6/8电动刀塔
- 液压尾座
- Hydraulic chuck
- Electric turret 6/8 position
- Hydraulic tailstock

FLAT BED CNC LATHE MACHINE



主要性能特点 Main features

- 5.5KW伺服主电机驱动
- 无级变速 润滑脂主轴
- 分体床身结构
- 360mm导轨宽度
- 5.5KW servo drive main motor
- Stepless speed grease spindle
- Divided bed structure
- 360mm bed width

SPECIFICATIONS		Units	CK6136	CK6140	CK6150	CK6160
床身上最大回转直径	Swing over bed	mm	360	400	500	600
横滑板上最大回转直径	Swing over cross slide	mm	190	210	260	350
最大工件长度	Distance between centers	mm	750/1000/1500/2000	750/1000/1500/2000	750/1000/1500/2000	750/1000/1500/2000
主轴孔径	Spindle bore	mm	52(Optional 80)	52(Optional 80)	52(Optional 80)	52(Optional 80)
主轴孔径锥度	Spindle bore taper	-	MT6	MT6	MT6	MT6
主轴端部形式	Spindle nose type	-	A2-6(A2-8)	A2-6(A2-8)	A2-6(A2-8)	A2-6(A2-8)
主轴转速级数	Spindle speed steps	rpm	无级Stepless	无级Stepless	无级Stepless	无级Stepless
主轴转速范围	Spindle speed range		1800	1800	1800	1800
刀架类型	Turret/tool post	-	Electric 4 position	Electric 4 position	Electric 4 position	Electric 4 position
刀具尺寸	Tool size	mm	20*20	20*20	25*25	25*25
X轴行程	X axis travel	mm	180	200	250	300
Z轴行程	Z axis travel	mm	750/1000/1500/2000	750/1000/1500/2000	750/1000/1500/2000	750/1000/1500/2000
X轴快速进给速度	X axis rapid traverse	mm/min	6000	6000	6000	6000
Z轴快速进给速度	Z axis rapid traverse	mm/min	8000	8000	8000	8000
尾座套筒直径	Tailstock quill diameter	mm	65	65	65	65
尾座套筒锥度	Tailstock quill taper	-	MT4	MT4	MT5	MT5
尾座套筒行程	Tailstock quill travel	mm	140	140	140	140
主电机功率	Main spindle motor	kw	5.5	5.5	5.5	5.5
冷却电机功率	Coolant pump motor	kw	0.125	0.125	0.125	0.125
机床重量 Machine weight	Weight for 750	kg	1500	1550	1600	1700
	Weight for 1000	kg	1600	1650	1700	1800
	Weight for 1500	kg	1800	1850	1900	2000
	Weight for 2000	kg	2000	2050	2100	2200
外形尺寸(长×宽×高) Overall dimension (L*W*H)	Dimension for 750	mm	2200*1600*1650	2200*1650*1700	2200*1700*1750	2200*1750*1800
	Dimension for 1000	mm	2500*1600*1650	2500*1650*1700	2500*1700*1750	2500*1750*1800
	Dimension for 1500	mm	3000*1600*1650	3000*1650*1700	3000*1700*1750	3000*1750*1800
	Dimension for 2000	mm	3500*1600*1650	3500*1650*1700	3500*1700*1750	3500*1750*1800

CAK6140V/CAK6150V
CAK6160V

Flat Bed CNC Lathe Machine
数控车床平身床



标准配置 Standard configuration

- 4工位电动刀架
- 手动三爪卡盘
- 主轴通孔80mm
- 无级变速
- Electric turret 4 position
- 3-jaw manual chuck
- Spindle bore 80mm
- Stepless speed

可选配置 Optional configuration

- 液压卡盘
- 6/8电动刀塔
- 液压尾座
- 可选双卡盘
- Hydraulic chuck
- Electric turret 6/8 position
- Hydraulic tailstock
- Double chuck as optional (130mm)

FLAT BED CNC LATHE MACHINE



主要性能特点 Main features

- 7.5KW伺服电机驱动
- 无级变速 润滑脂主轴
- 整体床身结构
- 400mm导轨宽度
- 7.5KW servo drive main motor
- Stepless speed grease spindle
- One piece casting structure
- 400mm bed width

SPECIFICATIONS		Units	CAK6140V	CAK6150V	CAK6160V
床身上最大回转直径	Swing over bed	mm	400	500	600
横滑板上最大回转直径	Swing over cross slide	mm	180	250	395
最大工件长度	Distance between centers	mm	1000/1500/2000/3000	1000/1500/2000/3000	1000/1500/2000/3000
主轴孔径	Spindle bore	mm		82 (选配Opt. 130)	
主轴孔径锥度	Spindle bore taper	-		公制Metric 90/1:20	
主轴端部形式	Spindle nose type	-		A2-8(选配Opt.A2-11)	
主轴转速级数	Spindle speed steps	-		无级变速Stepless	
主轴转速范围	Spindle speed range	rpm		1800 (选配Opt. 800)	
刀架类型	Turret/tool post	-		4工位电动刀架 Electric 4 position	
刀具尺寸	Tool size	mm	25*25	25*25	25*25
X轴行程	X axis travel	mm	240	280	320
Z轴行程	Z axis travel	mm	1000/1500/2000/3000	1000/1500/2000/3000	1000/1500/2000/3000
X轴快速进给速度	X axis rapid traverse	mm/min	6000	6000	6000
Z轴快速进给速度	Z axis rapid traverse	mm/min	8000	8000	8000
尾座套筒直径	Tailstock quill diameter	mm	75	75	75
尾座套筒锥度	Tailstock quill taper	-	MT5	MT5	MT5
尾座套筒行程	Tailstock quill travel	mm	150	150	150
主电机功率	Main motor power	kw	7.5	7.5	7.5(选配Opt.11)
冷却电机功率	Coolant motor power	kw	0.125	0.125	0.125
机床重量 Machine weight	Weight for 1000	kg	2500	2900	3200
	Weight for 1500	kg	2900	3300	3500
	Weight for 2000	kg	3300	3700	4000
外形尺寸(长×宽×高) Overall dimension (L*W*H)	Dimension for 1000	mm	2950*1700*1800	2950*1700*1800	2950*1800*1900
	Dimension for 1500	mm	3650*1700*1800	3650*1700*1800	3650*1800*1900
	Dimension for 2000	mm	4250*1700*1800	4250*1700*1800	4250*1800*1900

CAK6140/CAK6150/CAK6161
CAK6166/CAK6180

Flat Bed CNC Lathe Machine
数控车床平身床



标准配置 Standard configuration

- 4工位电动刀架
- 手动三爪卡盘
- 主轴通孔52mm
- 三档变速
- Electric turret 4 position
- 3-jaw manual chuck
- Spindle bore 52mm
- 3 Steps speed

可选配置 Optional configuration

- 液压卡盘
- 6/8电动刀塔
- 液压尾座
- Hydraulic chuck
- Electric turret 6/8 position
- Hydraulic tailstock

FLAT BED CNC LATHE MACHINE



主要性能特点 Main features

- 三档齿轮床头箱
- 档内无极变速
- 分体床身结构
- 400mm导轨宽度
- 3 steps speed geared spindle box
- Infinitely variable speed within gears
- Divided bed structure
- 400mm bed width

主要技术参数	SPECIFICATIONS	Units	CAK6140 CAK6140B	CAK6150 CAK6150B CAK6150C	CAK6161 CAK6161B CAK6161C	CAK6166 CAK6166B CAK6166C	CAK6180 CAK6180B CAK6180C
床身上最大回转直径	Swing over bed	mm	400	500	610	660	800
横滑板上最大回转直径	Swing over cross slide	mm	180	250	350	380	520
最大工件长度	Distance between centers	mm	750/1000/1500/2000/3000				
主轴孔径	Spindle bore	mm		52	(80 for B)	[105 for C]	
主轴孔径锥度	Spindle bore taper	-		MT6	(90 1:20 for B)	[113 1:20 for C]	
主轴端部形式	Spindle nose type	-		C6	(D8 for B)	[D8 for C]	
主轴转速级数	Spindle speed steps	-	手动3档 Manual 3 steps				
主轴转速范围	Spindle speed range	rpm	21-150,66-500,162-1500				
刀架类型	Turret/tool post	-	4工位电动刀架 Electric 4 position				
刀具尺寸	Tool size	mm	25*25	25*25	25*25	25*25	25*25
X轴行程	X axis travel	mm	200	250	310	330	400
Z轴行程	Z axis travel	mm	750/1000/1500/2000/3000				
X轴快速进给速度	X axis rapid traverse	mm/min	6000	6000	6000	6000	6000
Z轴快速进给速度	Z axis rapid traverse	mm/min	10000	10000	10000	10000	10000
尾座套筒直径	Tailstock quill diameter	mm	75	75	75	75	75
尾座套筒锥度	Tailstock quill taper	-	MT5	MT5	MT5	MT5	MT5
尾座套筒行程	Tailstock quill travel	mm	150	150	150	150	150
主电机功率	Main motor power	kw	7.5	7.5	7.5	11	11
冷却电机功率	Coolant motor power	kw	0.125	0.125	0.125	0.125	0.125
机床重量 Machine weight	Weight for 750	kg	2450	2500	2550	2650	2750
	Weight for 1000	kg	2550	2600	2650	2750	2850
	Weight for 1500	kg	2650	2700	2750	2850	2950
	Weight for 2000	kg	3050	3150	3250	3350	3450
	Weight for 3000	kg	3850	3950	4050	4150	4250
外形尺寸(长×宽×高) Overall dimension (L*W*H)	Dimension for 750	mm	2550*1650*1700	2550*1650*1750	2550*1700*1800	2550*1750*1850	2550*1750*1900
	Dimension for 1000	mm	2750*1650*1700	2750*1650*1750	2750*1700*1800	2750*1750*1850	2750*1750*1900
	Dimension for 1500	mm	3250*1650*1700	3250*1650*1750	3250*1700*1800	3250*1750*1850	3250*1750*1900
	Dimension for 2000	mm	3700*1650*1700	3700*1650*1750	3700*1700*1800	3700*1750*1850	3700*1750*1900
	Dimension for 3000	mm	4710*1650*1700	4710*1650*1750	4710*1700*1800	4710*1750*1850	4710*1750*1900

CK6163E/CK6180E

Flat Bed CNC Lathe Machine
数控车床平身床



SPECIFICATIONS	Units	CK6163E		CK6180E	
		手动换档 Manual	液压换档 HYD.	手动换档 Manual	液压换档 HYD.
床身上最大回转直径 Swing over bed	mm	630		800	
横滑板上最大回转直径 Swing over cross slide	mm	340		520	
最大工件长度 Distance between centers	mm	1000 - 10000		1000 - 10000	
床身导轨宽度 Guideway width	mm	550		550	
床身承重范围 Max. load capacity	T	3		3	
主轴孔径范围 Spindle bore	mm	105		105	
主轴孔径锥度 Spindle bore taper	-	Metric $\phi 120/MT6$		Metric $\phi 120/MT6$	
主轴鼻端型号 Spindle nose type	-	C11		C11	
主轴转速级数 Spindle speed steps	-	3档变频/VF. 3 steps	4档液压/HYD. 4 steps	3档变频/VF. 3 steps	4档液压/HYD. 4 steps
主轴转速范围 Spindle speed range	rpm	10-1000	17-1000	20-800	17-800
卡盘规格 Chuck	mm	$\phi 315$ 手动三爪/ $\phi 315$ 3-jaw manual		$\phi 315$ 手动三爪/ $\phi 315$ 3-jaw manual	
刀架类型 Turret/tool post	-	4工位电动刀架/Electric 4 position		4工位电动刀架/Electric 4 position	
刀具尺寸 Tool shank size	mm	32*32		32*32	
X轴行程 X axis travel	mm	320		420	
Z轴行程 Z axis travel	mm	850 - 9850		850 - 9850	
X轴快速进给速度 X axis rapid traverse	mm/min	4000		4000	
Z轴快速进给速度 Z axis rapid traverse	mm/min	6000		6000	
尾座套筒直径 Tailstock quill diameter	mm	$\phi 100$		$\phi 100$	
尾座套筒锥度 Tailstock quill taper	-	MT6		MT6	
尾座套筒行程 Tailstock quill travel	mm	250		250	
主轴电机 Main spindle motor	kw	11		11	
冷却泵电机 Coolant pump motor	kw	0.25		0.25	
外形尺寸(宽*高) Overall dimension(W*H)	mm	1750*1850		1850*1900	
外形尺寸长度 Overall dimension(L)	mm	3200 - 13200		3200 - 13200	
机床重量 Machine weight	T	4 - 10		4.5 - 10.5	

FLAT BED CNC LATHE MACHINE

CK6180F/CK61100F

Flat Bed CNC Lathe Machine
数控车床平身床



SPECIFICATIONS	Units	CK6180F		CK61100F	
		手动换档 Manual	液压换档 HYD.	手动换档 Manual	液压换档 HYD.
床身上最大回转直径 Swing over bed	mm	800		1000	
横滑板上最大回转直径 Swing over cross slide	mm	480		680	
最大工件长度 Distance between centers	mm	1000 - 10000		1000 - 10000	
床身导轨宽度 Guideway width	mm	600		600	
床身承重范围 Max. load capacity	T	4		4	
主轴孔径范围 Spindle bore	mm	105		105	
主轴孔径锥度 Spindle bore taper	-	Metric $\phi 120/MT6$		Metric $\phi 120/MT6$	
主轴鼻端型号 Spindle nose type	-	C11		C11	
主轴转速级数 Spindle speed steps	-	3档变频/VF. 3 steps	4档液压/HYD. 4 steps	3档变频/VF. 3 steps	4档液压/HYD. 4 steps
主轴转速范围 Spindle speed range	rpm	20-800	17-800	20-800	17-800
卡盘规格 Chuck	mm	$\phi 400$ 手动三爪/ $\phi 400$ 3-jaw manual		$\phi 400$ 手动三爪/ $\phi 400$ 3-jaw manual	
刀架类型 Turret/tool post	-	4工位电动刀架/Electric 4 position		4工位电动刀架/Electric 4 position	
刀具尺寸 Tool shank size	mm	40*40		40*40	
X轴行程 X axis travel	mm	420		520	
Z轴行程 Z axis travel	mm	850 - 9850		850 - 9850	
X轴快速进给速度 X axis rapid traverse	mm/min	4000		4000	
Z轴快速进给速度 Z axis rapid traverse	mm/min	6000		6000	
尾座套筒直径 Tailstock quill diameter	mm	$\phi 120$		$\phi 120$	
尾座套筒锥度 Tailstock quill taper	-	MT6		MT6	
尾座套筒行程 Tailstock quill travel	mm	250		250	
主轴电机 Main spindle motor	kw	15		15	
冷却泵电机 Coolant pump motor	kw	0.25		0.25	
外形尺寸(宽*高) Overall dimension(W*H)	mm	1950*1900		2100*2150	
外形尺寸长度 Overall dimension(L)	mm	3500 - 12500		3500 - 12500	
机床重量 Machine weight	T	5 - 11		5.5 - 11.5	

CK61100L/CK61125L
CK61140L/CK61160L

Flat Bed CNC Lathe Machine
数控车床平身床



SPECIFICATIONS	Units	CK61100L	CK61125L	CK61140L	CK61160L
床身上最大回转直径 Swing over bed	mm	1000	1250	1400	1600
横滑板上最大回转直径 Swing over cross slide	mm	610	850	1000	1200
最大工件长度 Distance between centers	mm	1500 - 10000	1500 - 10000	1500 - 10000	1500 - 10000
床身导轨宽度 Guideway width	mm	755	755	755	755
床身承重范围 Max. load capacity	T	6	6	6	6
主轴孔径范围 Spindle bore	mm	130	130	130	130
主轴孔径锥度 Spindle bore taper	-	公制Metric φ160/MT6	公制Metric φ160/MT6	公制Metric φ160/MT6	公制Metric φ160/MT6
主轴鼻端型号 Spindle nose type	-	A2-15	A2-15	A2-15	A2-15
主轴转速级数 Spindle speed steps	-	4档变频/VF. 4steps (选配Opt. 4 档液压/HYD. 4 steps)			
主轴转速范围 Spindle speed range	rpm	4-300	4-300	4-300	4-300
卡盘规格 Chuck	mm	φ1000手动四爪/φ1000 4-jaw manual			
刀架类型 Turret/tool post	-	4工位电动刀架/Electric 4 position			
刀具尺寸 Tool shank size	mm	40*40	40*40	40*40	40*40
X轴行程 X axis travel	mm	520	620	720	720
Z轴行程 Z axis travel	mm	1250-9750	1250-9750	1250-9750	1250-9750
X轴快速进给速度 X axis rapid traverse	mm/min	4000	4000	4000	4000
Z轴快速进给速度 Z axis rapid traverse	mm/min	6000	6000	6000	6000
尾座套筒直径 Tailstock quill diameter	mm	φ160	φ160	φ160	φ160
尾座套筒锥度 Tailstock quill taper	-	MT6	MT6	MT6	MT6
尾座套筒行程 Tailstock quill travel	mm	300	300	300	300
主轴电机 Main spindle motor	kw	22	22	22	22
冷却泵电机 Coolant pump motor	kw	0.25	0.25	0.25	0.25
外形尺寸(宽×高) Overall dimension(W*H)	mm	2100*2100	2250*2300	2350*2450	2350*2600
外形尺寸长度 Overall dimension(L)	mm	5000-14000	5000-14000	5000-14000	5000-14000
机床重量 Machine weight	T	10-19	11-20	12-21	13-22

FLAT BED CNC LATHE MACHINE

CK61125G/CK61140G
CK61160G/CK61180G
CK61200G

Flat Bed CNC Lathe Machine
数控车床平身床



SPECIFICATIONS	Units	CKL61125G	CK61140G	CK61160G	CK61180G	CK61200G
床身上最大回转直径 Swing over bed	mm	1300	1500	1700	1900	2100
横滑板上最大回转直径 Swing over cross slice	mm	850	1050	1250	1450	1650
最大工件长度 Distance between centers	mm	3000-20000	3000-20000	3000-20000	3000-20000	3000-20000
床身导轨宽度 Guideway width	mm	1100	1100	1100	1100	1100
床身承重范围 Max.load capacity	T	10/15 (G/I) / 20 (G/II) / 30 (G/III)				
主轴孔径范围 Spindle bore	mm	100 /130	100 /130	100 /130	100 /130	100 /130
主轴孔径锥度 Spindle bore taper	-	公制Metric120 /公制Metric140				
主轴鼻端型号 Spindle nose type	-	1：30加长主轴头	1：30加长主轴头	1：30加长主轴头	1：30加长主轴头	1：30加长主轴头
主轴转速级数 Spindle speed steps	-	4档变频 / VF. 4steps				
主轴转速范围 Spindle speed range	pm	10-300/2-200				
卡盘规格 Chuck	mm	φ1250手动四爪/φ1250 4-jaw manual			φ1600手动四爪/φ1600 4-jaw manual	
刀架类型 Turret/tool post	-	4工位电动刀架 /Electric 4 position				
刀具尺寸 Tool size	mm	50*50	50*50	50*50	50*50	50*50
X轴行程 X axis travel	mm	650	750	750	850	850
Z轴行程 Z axis travel	mm	2750-19750	2750-19750	2750-19750	2750-19750	2750-19750
X轴快速进给速度 X axis rapid traverse	mm/min	4000	4000	4000	4000	4000
Z轴快速进给速度 Z axis raoid traverse	mm/min	6000	6000	6000	6000	6000
尾座套筒直径 Tailstock quill diameter	mm	φ260	φ260	φ260	φ260	φ260
尾座套筒锥度 Teilstock quill taper		公制80/Metric 80	公制80/Metric 80	公制80/Metric 80	公制80/Metric 80	公制80/Metric 80
尾座套筒行程 Taistock quill travel	mm	300	300	300	300	300
主轴电机 Main spindle motor	kW	30	30	30	37	37
冷却泵电机 Coolant pump motor	kW	0.25	0.25	0.25	0.25	0.25
外形尺寸(宽×高) Overall dimension(W*H)	mm	2000*1950	2250*2050	2250*2150	2300*2250	2300*2250
外形尺寸长度 Overall dimension(L)	mm	7200-24200	7200-24200	7200-24200	7200-24200	7200-24200
机器重量(5米规格) Net weight	t	20	21	22	23	24

QK1313/QK1319/QK1322
QK1325/QK1327

CNC Pipe Threading Lathe Machine
数控管子螺纹车床



SPECIFICATIONS		Units	QK1313	QK1319	QK1322	QK1325	QK1327
床身上最大回转直径	Swing over bed	mm	630/800	630/800	630/800	800/1000	800/1000
横滑板上最大回转直径	Swing over cross slide	mm	340/520	340/520	340/520	480/680	480/680
最大工件长度	Distance between centers	mm	1000-6000	1000-6000	1000-6000	1000-6000	1000-6000
加工管螺纹直径范围	Pipe threading range	mm	30-126	50-193	50-220	50-250	50-270
床身导轨宽度	Guideway width	mm	550	550	550	600	600
床身承重范围	Max. load capacity	T	3	3	3	4	4
主轴孔径范围	Spindle bore	mm	130	206	225	255	280
主轴转速级数	Spindle speed steps	-	3档变频/VF. 3 steps		4档变频/VF. 4 steps		
主轴转速范围	Spindle speed range	rpm	30-800	20-500	20-500	25-350	25-350
卡盘规格	Chuck	mm	φ400手动3爪 /3-jaw manual	φ500手动4爪 /4-jaw manual	φ500手动4爪 /4-jaw manual	φ630手动4爪 /4-jaw manual	φ680手动4爪 /4-jaw manual
刀架类型	Turret/tool post	-	4工位电动刀架/Electric 4 position				
刀具尺寸	Tool shank size	mm	32*32	32*32	32*32	40*40	40*40
X轴行程	X axis travel	mm	340/420	340/420	340/420	420/500	420/500
Z轴行程	Z axis travel	mm	1000-6000	1000-6000	1000-6000	1000-6000	1000-6000
X轴快速进给速度	X axis rapid traverse	mm/min	4000	4000	4000	4000	4000
Z轴快速进给速度	Z axis rapid traverse	mm/min	6000	6000	6000	6000	6000
尾座套筒直径	Tailstock quill diameter	mm	φ100	φ100	φ100	φ120	φ120
尾座套筒锥度	Tailstock quill taper	-	MT6	MT6	MT6	MT6	MT6
尾座套筒行程	Tailstock quill travel	mm	250	250	250	250	250
主轴电机	Main spindle motor	kW	11	11	11	15	15
冷却泵电机	Coolant motor power	kW	0.25	0.25	0.25	0.25	0.25
机器净重	Net weight	T	4-8	4.6-8.6	4.7-8.7	6-9.5	6.2-9.7
外形尺寸(宽 x 高)	Overall dimension (W*H)	mm	1800*1850	1880*1850	1880*1850	1930*1900	1930*1900
外形尺寸(长)	Overall dimension (L)	mm	3000-8300	3000-8300	3000-8300	3600-8600	3600-8600

CNC PIPE THREADING LATHE MACHINE

QKD1325/QKD1330
QKD1335

CNC Pipe Threading Lathe Machine
数控管子螺纹车床



SPECIFICATIONS		Units	QKD1325	QKD1330	QKD1335
床身上最大回转直径	Swing over bed	mm	800	900	900
横滑板上最大回转直径	Swing over cross slide	mm	435	535	535
最大工件长度	Distance between centers	mm	1000-3000	1000-3000	1000-3000
加工管螺纹直径范围	Pipe threading range	mm	50-235	11-290	110-340
床身导轨宽度	Guideway width	mm	755	755	755
床身承重范围	Max. load capacity	T	5	5	5
主轴孔径范围	Spindle bore	mm	240	305	355
主轴转速级数	Spindle speed steps	-	无级变速/Stepless		
主轴转速范围	Spindle speed range	rpm	90-450	90-350	90-350
卡盘规格	Chuck	mm	φ630电动复合卡盘/φ630 Manual electric integrated chuck φ780电动复合卡盘/φ780 Manual electric integrated chuck		
刀架类型	Turret/tool post	-	4工位电动刀架/Electric 4 position		
刀具尺寸	Tool shank size	mm	32*32	40*40	40*40
X轴行程	X axis travel	mm	480	480	480
Z轴行程	Z axis travel	mm	1000-3000	1000-3000	1000-3000
X轴快速进给速度	X axis rapid traverse	mm/min	4000	4000	4000
Z轴快速进给速度	Z axis rapid traverse	mm/min	6000	6000	6000
主轴电机	Main motor power	kW	22	22	22
冷却泵电机	Coolant motor power	kW	0.25	0.25	0.25
机器净重	Net weight	T	8.1-10	8.9-11	10.9-12
外形尺寸(宽 x 高)	Overall dimension (W*H)	mm	2050*2050	2050*2050	2050*2050
外形尺寸(长)	Overall dimension (L)	mm	3952-5950	3952-5950	3952-5950

QK1327/QK1332/QK1338

CNC Pipe Threading Lathe Machine
数控管子螺纹车床



SPECIFICATIONS		Units	QK1327	QK1332	QK1338
床身上最大回转直径	Swing over bed	mm	1000	1000	1000
横滑板上最大回转直径	Swing over cross slide	mm	610	610	610
最大工件长度	Distance between centers	mm	1500-6000	1500-6000	1500-6000
加工管螺纹直径范围	Pipe threading range	mm	130-270	190-320	190-380
床身导轨宽度	Guideway width	mm	755	755	755
床身承重范围	Max. load capacity	T	6	6	6
主轴孔径范围	Spindle bore	mm	280	330	390
主轴转速级数	Spindle speed steps	-	4档变频/VF. 4 steps		3档变频/VF. 3 steps
主轴转速范围	Spindle speed range	rpm	10-320	10-280	8-205
卡盘规格	Chuck	mm	φ800手动四爪 /4-jaw manual	φ780电动四爪 /4-jaw electric	φ850电动四爪 /4-jaw electric
刀架类型	Turret/tool post	-	4工位电动刀架/Electric 4 position		
刀具尺寸	Tool shank size	mm	40*40	40*40	40*40
X轴行程	X axis travel	mm	520	520	520
Z轴行程	Z axis travel	mm	1250-5750	1250-5750	1250-5750
X轴快速进给速度	X axis rapid traverse	mm/min	4000	4000	4000
Z轴快速进给速度	Z axis rapid traverse	mm/min	6000	6000	6000
尾座套筒直径	Tailstock quill diameter	mm	φ160	φ160	φ160
尾座套筒锥度	Tailstock quill taper	-	MT6	MT6	MT6
尾座套筒行程	Tailstock quill travel	mm	300	300	300
主轴电机	Main motor power	kW	22	22	22
冷却泵电机	Coolant motor power	kW	0.25	0.25	0.25
机器净重	Net weight	T	10.5-15.6	11.5-15.9	12-16.4
外形尺寸(宽 x 高)	Overall dimension (W*H)	mm	2050*2050	2080*2080	2220*2120
外形尺寸(长)	Overall dimension (L)	mm	4950-9450	5000-9500	5000-9500

CNC PIPE THREADING LATHE MACHINE

QK1343/QK1350/QK1363

CNC Pipe Threading Lathe Machine
数控管子螺纹车床



SPECIFICATIONS		Units	QK1343	QK1350	QK1363
床身上最大回转直径	Swing over bed	mm	1000	1200	1500
横滑板上最大回转直径	Swing over cross slide	mm	610	710	900
最大工件长度	Distance between centers	mm	1500/3000	1500/3000	1500/3000
加工管螺纹直径范围	Pipe threading range	mm	270-430	330-510	330-630
床身导轨宽度	Guideway width	mm	755	755	1100
床身承重范围	Max. load capacity	T	6	6	10
主轴孔径范围	Spindle bore	mm	440	520	640
主轴转速级数	Spindle speed steps	-	3档变频/VF. 3 steps		
主轴转速范围	Spindle speed range	rpm	10-210	10-200	1-170
卡盘规格	Chuck	mm	φ1000电动四爪/4-jaw electric		φ1250电动四爪 /4-jaw electric
刀架类型	Turret/tool post	-	4工位电动刀架/Electric 4 position		
刀具尺寸	Tool shank size	mm	40*40	50*50	50*50
X轴行程	X axis travel	mm	520	520	750
Z轴行程	Z axis travel	mm	1250/2750	1250/2750	1250/2750
X轴快速进给速度	X axis rapid traverse	mm/min	4000	4000	4000
Z轴快速进给速度	Z axis rapid traverse	mm/min	6000	6000	6000
尾座套筒直径	Tailstock quill diameter	mm	φ160	φ160	φ260
尾座套筒锥度	Tailstock quill taper	-	MT6	MT6	Metric80
尾座套筒行程	Tailstock quill travel	mm	300	300	300
主轴电机	Main motor power	kW	22	22	37
冷却泵电机	Coolant motor power	kW	0.25	0.25	0.25
机器净重	Net weight	T	13/14	15/16	18/19.3
外形尺寸(宽 x 高)	Overall dimension (W*H)	mm	2220*2120	2300*2200	2500*2500
外形尺寸(长)	Overall dimension (L)	mm	5000/6500	5000/6500	5600/7100

VTC500/VTC650/VTC750
VTC850/VTC1000

CNC Vertical Lathe Machine
数控立车



CNC VERTICAL LATHE MACHINE

标准配置 Standard configuration

- 台湾上银线轨、丝杠
Taiwan HIWIN linear rails,ball screw
- 台湾液压卡盘
Taiwan hydraulic chuck
- 台湾主轴单元 (进口轴承)
Taiwan spindle units (imported bearing)
- 台湾刀塔
Taiwan turret
- 容积式润滑
Volumetric lubrication
- 冷却及冲屑
Cooling & Chipping
- 链式排屑器
Chain type chip conveyor
- 工作灯；三色报警灯；脚踏开关；电柜空调
Worklamp; Three-color alarm light; Foot switch ; Electric cabinet air conditioner
- 丝杠线轨内防护
Screw rail inner protection
- 全防护钣金罩；气动推拉门
Full protective sheet metal cover; pneumatic sliding door
- 配套液压站
Equiped with hydraulic station
- 数控系统：GSK980TDi
CNC system : GSK980TDi

SPECIFICATIONS	Units	VTC500	VTC650	VTC750	VTC850	VTC1000
最大回转直径 Max. Swing diameter	mm	500	650	750	850	1000
最大车削直径 Max. Turning diameter	mm	400	550	650	750	850
主轴型号 Spindle nose type		A2-8	A2-8	A2-11	A2-11	A2-11
主轴轴承直径 Diameter of spindle bearing	mm	120	120	180	180	180
主轴转速范围 Spindle speed range	rpm	50-1250	50-1250	50-1000	30-800	30-800
主轴输出扭矩 Spindle output torque	nm	350	475	715	890	890
卡盘直径 Chuck diameter	"	12" HYD液压卡盘	15" HYD液压卡盘	21" HYD液压卡盘	24" HYD液压卡盘	32" HYD液压卡盘
刀塔形式 Turret type		卧式 8 工位 Hor.8 position		卧式8 工位/立式4 工位 Hor.8 position / Ver.4 position		立式4 工位 Ver.4 position
刀塔规格 Turret spec.		100	100	125	125	125
刀具尺寸 Tool size	mm	□25/φ40	□25/φ40	□32/φ50	□32/φ50	□32/φ50
刀塔 X 轴行程 Turret travel X axis	mm	-325	-375	-425	-500	-600
刀塔 Z 轴行程 Turret travel Z axis	mm	500	550	700	800	800
刀塔下端面距卡盘上端面距离 Distance from Bottom of turret to up of chuck	mm	0-500	0-550	0-700	0-800	0-800
X/Z 线轨 X/Z linear rails		45 滚柱Roller	45 滚柱Roller	55 滚柱Roller	55 滚柱Roller	55 滚柱Roller
X/Z 丝杠直径 Diameter of X/Z screw	mm	φ40	φ40	φ50/φ40	φ50/φ40	φ50/φ40
X 轴快速进给 X-axis rapid traverse	m/min	15	15	15	15	15
Z 轴快速进给 Z-axis rapid traverse	m/min	12	12	12	12	12
切削进给 Cutting feeding	m/min	0.1-5000	0.1-5000	0.1-5000	0.1-5000	0.1-5000
X 轴电机功率/扭矩 X axis motor power/torque	Kw/nm	1.6/10	2.4/15	2.4/15	2.8/18	3.5/22
Z 轴电机功率/扭矩 Z axis motor power/torque	Kw/nm	2.4/15	2.4/15	2.8/18	3.5/22	3.5/22
主轴电机功率/扭矩 Main motor power/torque	Kw/nm	11/15- 140	15/18.5- 190	22/30- 286	30/37- 356	30/37- 356
外形尺寸(长×宽×高) Overall size (L*W*H)	m	1.8*1.8*2.5	1.95*1.85*2.65	2.3*2*3	2.5*2.25*3.15	2.6*2.35*3.15
机床重量 Machine weight	kg	4200	5200	7200	9500	10500

VTC1250/VTC1400
VTC1600

CNC Vertical Lathe Machine
数控立车



CNC VERTICAL LATHE MACHINE

标准配置 Standard configuration

- 手动四爪卡盘；双速齿轮箱
Manual 4 jaw chuck, double -speed gear box
 - 台湾上银线轨、丝杠
Taiwan HIWIN linear rails、 ball screw
 - 台湾刀塔
Taiwan turret
 - 链式排屑器
Chain type chip conveyor
 - 数控系统：GSK980TDi
CNC system：GSK980TDi
- 工作灯；三色报警灯；脚踏开关；电柜空调
Working light; Three-color alarm light; Foot switch; Electric cabinet air conditioner
 - 丝杠线轨内防护
Screw rail inner protection
 - 氮气平衡
Nitrogen balance
 - 全防护钣金罩；气动推拉门
Full protective sheet metal cover; pneumatic sliding door
 - 配套液压站
Equiped with hydraulic station

SPECIFICATIONS	Units	VTC1250	VTC1400	VTC1600
最大回转直径 Max. Swing diameter	mm	1250	1400	1600
最大车削直径 Max. Turning diameter	mm	1050	1250	1400
主轴型号 Spindle nose type		A2-11	A2-11	A2-15
主轴轴承直径 Diameter of spindle bearing	mm	180	180	200
主轴转速范围 Spindle speed range	rpm	20-500 双速齿轮箱 20-500 Double speed gearbox	20-400 双速齿轮箱 20-400 Double speed gearbox	20-350 双速齿轮箱 20-350 Double speed gearbox
主轴输出扭矩 Spindle output torque	nm	2100	2100	3000
卡盘直径 Chuck diameter	"	φ1000手动四爪 φ1000 4-jaw manual	φ1250手动四爪 φ1250 4-jaw manual	φ1400手动四爪 φ1400 4-jaw manual
刀塔形式 Turret type		立式 4 工位 Ver.4 position	立式 4 工位 Ver.4 position	立式 4 工位 Ver.4 position
刀塔规格 Turret spec.		125	125	125
刀具尺寸 Tool size	mm	□32/φ50	□32/φ50	□32/φ50
刀塔 X 轴行程 Turret travel X axis	mm	-700	-800	-900
刀塔 Z 轴行程 Turret travel Z axis	mm	800	800	800
刀塔下端面距卡盘上 端面距离 Distance from Bottom of turret to up of chuck	mm	150-950	150-950	150-950
X/Z 线轨 X/Z linear rails		65/55 滚柱Roller	65/55 滚柱Roller	65 滚柱Roller
X/Z 丝杠直径 Diameter of X/Z screw	mm	φ50	φ50	φ63
X 轴快速进给 X-axis rapid traverse	m/min	15	15	15
Z 轴快速进给 Z-axis rapid traverse	m/min	12	12	12
切削进给 Cutting feeding	m/min	0.1-5000	0.1-5000	0.1-5000
X 轴电机功率/扭矩 X axis motor power/torque	Kw/nm	3.5/22	3.5/22	4.7/30
Z 轴电机功率/扭矩 Z axis motor power/torque	Kw/nm	3.5/22	4.7/30	4.7/30
主轴电机功率/扭矩 Main motor power/torque	Kw/nm	22/30- 210	22/30- 210	30/37- 286
外形尺寸(长×宽×高) Overall size (L*W*H)	m	2.7*2.85*3.25	2.8*2.95*3.25	3.0*3.0*3.25
机床重量 Machine weight	kg	12800	13800	15500

VTC5050/VTC6560/VTC7570
VTC8580/VTC10085

CNC Vertical Lathe Machine
数控立车



● 墙板式结构
Wall panel structure

CNC VERTICAL LATHE MACHINE

标准配置 Standard configuration

- 台湾上银线规、丝杠
Taiwan HIWIN linear rails、Ball screw
- 台湾液压卡盘
Taiwan Hydraulic chuck
- 台湾主轴单元 (进口轴承)
Taiwan spindle unite (imported bearing)
- 台湾刀塔
Taiwan Turret
- 容积式润滑
Volumetric lubrication
- 冷却及冲屑
Cooling & Chipping
- 链式排屑器
Chain type chip conveyor
- 工作灯；三色报警灯；脚踏开关； 电柜空调
Worklamp; Three-color alarm light; Foot switch ; Electric cabinet air conditioner
- 丝杠线轨内防护
Screw rail inner protection
- 全防护钣金罩；气动推拉门
Full protective sheet metal cover; pneumatic sliding door
- 配套液压站
Equiped with Hydraulic station
- 数控系统：GSK980TDi
CNC system : GSK980TDi


SPECIFICATIONS	Units	VTC5050	VTC6560	VTC7570	VTC8580	VTC10085
最大回转直径 Max. Swing diameter	mm	500	650	750	850	1000
最大车削直径 Max. Turning diameter	mm	400	550	650	750	900
主轴型号 Spindle nose type		A2-8	A2-8	A2-11	A2-11	A2-11
主轴轴承直径 Diameter of spindle bearing	mm	120	130	160	160	160
主轴转速范围 Spindle speed range	rpm	50-1250	50-1500	50-1250	30-1000	30-800
主轴输出扭矩 Spindle output torque	nm	350	380	715	890	1178
三爪液压卡盘直径 3 Jaw hydraulic chuck diameter	"	12	15	21	24	32
刀塔形式 Turret type		卧式 8 工位 Hor.8 position				卧式 8 /12工位 Hor.8 /12position
刀塔规格 Turret spec.	mm	100	100	125	125	125
刀具规格 Tools spec.	mm	□25/φ40	□25/φ40	□32/φ50	□32/φ50	□32/φ50
刀塔 X 轴行程 Turret travel X axis	mm	-325	-375	-425	-475	-525
刀塔 Z 轴行程 Turret travel Z axis	mm	500	600	700	800	850
刀塔下端面距卡盘上端面距离 Distance from Bottom of turret to up of chuck	mm	0-500	0-600	0-700	0-800	0-850
X 轴快速进给 X-axis rapid traverse	m/min	15	15	15	15	15
Z 轴快速进给 Z-axis rapid traverse	m/min	15	15	12	12	12
切削进给 Cutting feeding	m/min	0.1-5000	0.1-5000	0.1-5000	0.1-5000	0.1-5000
X/Z 线轨 XZ linear rails		45 滚柱Roller	45 滚柱Roller	45 滚柱Roller	55 滚柱Roller	55 滚柱Roller
X/Z 丝杠直径 Diameter of XZ screw	mm	φ40	φ40	φ40	Φ50	Φ50
X 轴电机功率/扭矩 X axis motor power/torque	Kw/nm	1.6/10	2.4/15	2.8/18	2.8/18	3.5/22
Z 轴电机功率/扭矩 Z axis motor power/torque	Kw/nm	2.4/15	2.8/18	2.8/18	3.5/22	3.5/22
主电机功率/扭矩 Main motor power/torque	Kw- nm	11/15- 140	15/18.5- 190	22/30- 286	30/37- 356	37/47- 471
外形尺寸(长×宽×高) Overall size (L*W*H)	m	1.8*1.85*2.7	2.15*2.18*2.85	2.25*2.35*3	2.3*2.4*3.2	2.5*2.6*3.4
机床重量 Machine weight	kg	4500	6300	7800	9500	11800

CK5112T/CK5116T
CK5120T/CK5125T

CNC Vertical Lathe Machine
数控立车

标准配置 Standard configuration

- 台湾上银线轨、丝杠
Taiwan HIWIN linear rails, ball screw
- 硬轨贴意大利塑带
Hard rails with Italian plastic tape
- 台湾丞鑫斜8度刀塔
Taiwan TCSM slanted 8 degree turret
- 链式排屑器
Chain type chip conveyor
- 短锥重载主轴结构
Short taper heavy-duty spindle structure
- 意大利双速齿轮箱配合大小齿轮降速
Italian two-speed gearbox with large and small gears to reduce speed
- 高转速、高精度
High speed, high precision

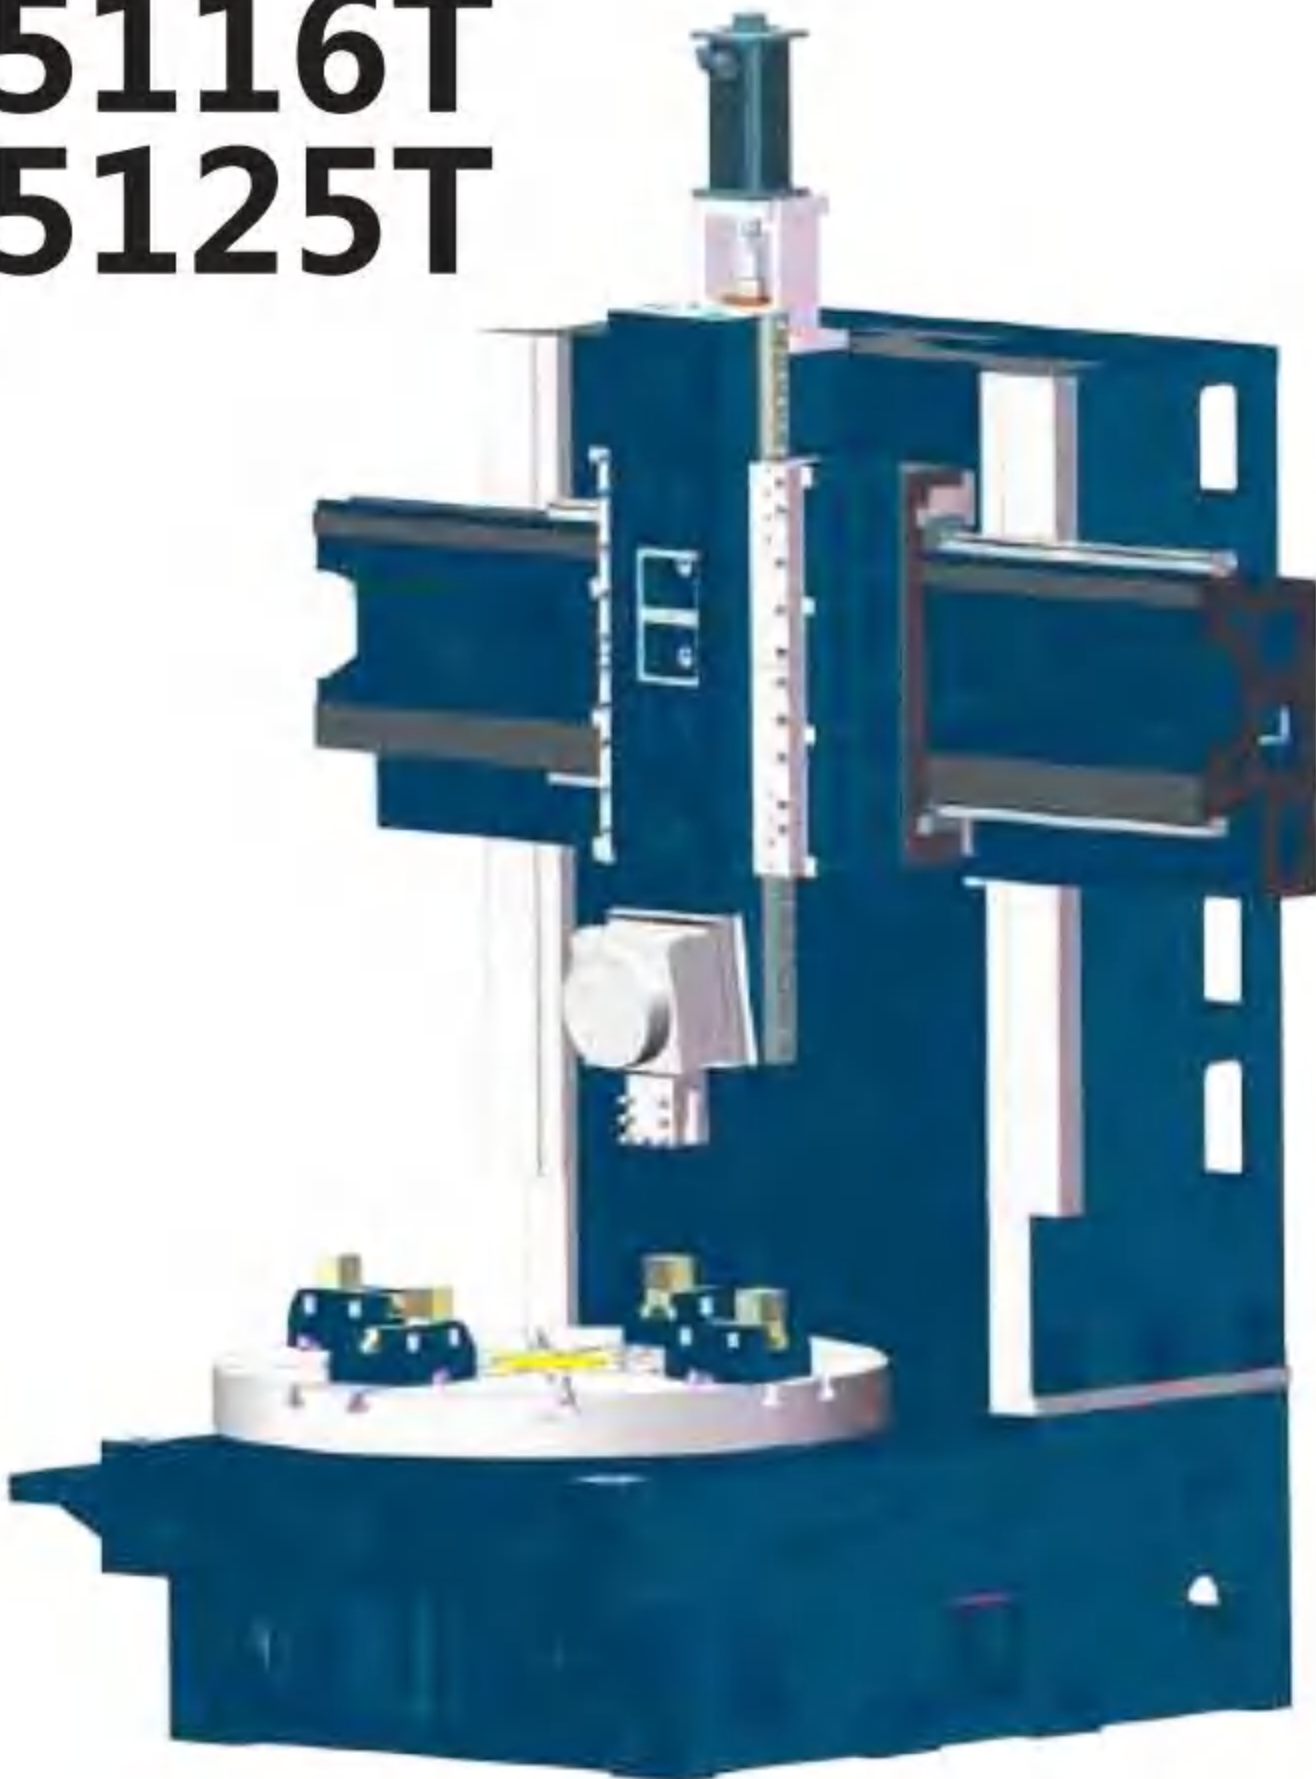

SPECIFICATIONS		Units	CK5112T	CK5116T	CK5120T	CK5125T
最大回转直径	Max. Swing diameter	mm	1400	1600	2000	2500
最大车削直径	Max. Turning diameter	mm	1250	1600	2000	2500
最大车削高度	Max. turning height	mm	1000	1000	1000	1200
工作台直径	Worktable diameter	mm	1000	1400	1800	2250
工作台承重	Worktable load	kg	4000	6000	8000	8000
主轴转速范围(双速)	Spindle speed range (two-speed motor)	rpm	5-400	2.5-315	2.5-250	3-200
主轴输出扭矩	Spindle output torque	nm	8000	12500	20000	20000
刀塔形式	Turret type		4工位station	4工位station	4工位station	4工位station
刀塔规格	Turret spec.	mm	320	320	320	320
刀具尺寸	Tool size	mm	□40/φ80	□40/φ80	□40/φ80	□40/φ80
刀塔 X 轴行程	Turret travel X axis	mm	-50-650	-50-1000	-50-1200	-50-1400
刀塔 Z 轴行程	Turret travel Z axis	mm	650	650	650	650
横梁升降行程	Cross beam lifting stroke	mm	700	700	700	700
X 轴快速进给	X-axis rapid traverse	m/min	15	15	15	15
Z 轴快速进给	Z-axis rapid traverse	m/min	12	12	12	12
切削进给	Cutting feeding	m/min	0.1-5000	0.1-5000	0.1-5000	0.1-5000
X/Z 线轨+硬轨	X/Z axis linear rail + hard rail		55/45 滚柱+硬轨 55/45 Roller guide + hard guide			
主轴电机功率/扭矩	Main motor power/torque	kw-nm	22/30-210	22/30-210	30/37-286	30/37-286
外形尺寸(长×宽×高)	Overall size (L*W*H)	m	3.8*2.8*3.5	4.2*3*3.5	4.6*3.5*3.5	4.8*3.6*3.8
机床重量	Machine weight	kg	13800	16500	18500	20800
硬轨线轨结合; 4 工位刀塔 Hard guideway and linear guideway combination, 4 station electric turret						

CNC VERTICAL LATHE MACHINE

CK5112F/CK5116F
CK5120F/CK5125F

CNC Vertical Lathe Machine
数控立车

标准配置 Standard configuration

- 台湾丝杠
Taiwan HIWIN ball screw
- 硬轨贴意大利塑带
Slid rails with Italian plastic tape
- 台湾方形滑枕
Taiwan square ram
- 链式排屑器
Chain type chip conveyor
- 短锥重载主轴结构
Short taper heavy-duty spindle structure
- 意大利双速齿轮箱配合大小齿轮降速
Italian two-speed gearbox with large and small gears to reduce speed
- 高转速、高精度
High speed, high precision



SPECIFICATIONS		Units	CK5112F	CK5116F	CK5120F	CK5125F
最大回转直径	Max. Swing diameter	mm	1400	1600	2000	2500
最大车削直径	Max. Turning diameter	mm	1250	1600	2000	2500
最大车削高度	Max. turning height	mm	1000	1000	1000	1200
工作台直径	Worktable diameter	mm	1000	1400	1800	2250
工作台承重	Worktable load	kg	4000	6000	8000	10000
主轴转速范围(双速)	Spindle speed range (two-speed motor)	rpm	5-400	2.5-315	2.5-250	3-200
主轴输出扭矩	Spindle output torque	nm	8000	12500	20000	20000
刀塔形式	Turret type		方形滑枕 排刀 Square ram Gang type tool			
刀塔规格	Turret spec.	mm	滑枕截面 200x200 Ram section 200*200			
刀具尺寸	Tool size	mm	□40	□40	□40	□40
刀塔 X 轴行程	Turret travel X axis	mm	-50-650	-50-1000	-50-1200	-50-1400
刀塔 Z 轴行程	Turret travel Z axis	mm	1000	1000	1000	1000
横梁升降行程	Cross beam lifting stroke	mm	800	800	800	800
X 轴快速进给	X-axis rapid traverse	m/min	12	12	12	12
Z 轴快速进给	Z-axis rapid traverse	m/min	12	12	12	12
切削进给	Cutting feeding	m/min	0.1-5000	0.1-5000	0.1-5000	0.1-5000
X/Z 线轨+硬轨	X/Z axis linear rail + hard rail		硬轨 Hard guide	硬轨 Hard guide	硬轨 Hard guide	硬轨 Hard guide
主轴电机功率/扭矩	Main motor power/torque	kw-nm	22/30-210	22/30-210	22/30-210	30/37-286
外形尺寸(长×宽×高)	Overall size (L*W*H)	m	3.5*2.6*3.7	4*2.8*3.7	4.6*3.5*3.7	4.8*3.6*3.8
机床重量	Machine weight	kg	12500	14500	18500	20800
硬轨结构; 方形滑枕 Hard -rail structure; square ram						

CK5112×H/3 CK5116×H/5
CK5120×H/8 CK5123×H/8
CK5126×H/8

CNC Vertical Lathe Machine
数控立车



标准配置 Standard configuration

- 台湾液压卡盘
Taiwan hydraulic chuck
- 台湾主轴单元 (进口轴承)
Taiwan spindle units (imported bearing)
- 台湾刀塔
Taiwan turret
- 容积式润滑
Volumetric lubrication
- 冷却及冲屑
Cooling & Chipping
- 链式排屑器
Chain type chip conveyor
- 工作灯; 三色报警灯; 脚踏开关; 电柜空调
Worklamp; Three-color alarm light; Foot switch ; Electric cabinet air conditioner
- 丝杠线轨内防护
Screw rail inner protection
- 全防护钣金罩; 气动推拉门
Full protective sheet metal cover; pneumatic sliding door
- 配套液压站
Equiped with hydraulic station
- 数控系统: GSK980TDi
CNC system : GSK980TDi

CNC VERTICAL LATHE MACHINE



可选配置 Opt.

- 全防护 Full cover

SPECIFICATIONS	Units	CK5112×H/3	CK5116×H/5	CK5120×H/8	CK5123×H/8	CK5126×H/8
最大车削直径 Max.turning diameler	mm	1250	1600	2000	2300	2600
工作台直径 Table diameter	mm	1000	1400	1800	2000	2250
最大工件高度 Max.height of workpiece	mm	1000/1200	1000/1400	1250/1400	1350/1600	1350/1600
最大工件重量 Max.weight of workpiece	t	3	5	8	8	8
工作台最大扭矩 Max.torque of table	kn.m	17	25	32	35	35
工作台转速范围(16级) Spindle speed range(16steps)	r/min	6.3-200	5-160	3.2-100	3.2-100	2-63
垂直刀架最大切削力 Max.cutting force of vertical tool holder	kn	18	22	22	22	22
刀架进级量范围 Range of tool feed	mm/min	0.1-500	0.1-500	0.1-500	0.1-500	0.1-500
垂直刀架水平行程 Horizontal travel of vertical tool holder	mm	700	915	1050	1180	1380
垂直刀架滑枕行程 Vertical tool holder slide travel	mm	650	800	800	1000	1000
刀架快速移动速度 Tool holder rapid traverse	mm/min	2500	3750	3750	3750	3750
横梁升降速度 Elevating speed of cross beam	mm/min	440	440	440	440	440
刀具尺寸 Tool shank size	mm	30×40	30×40	30×40	30×40	30×40
主电机功率 Main motor power	kw	22	30	30	30	37
外形尺寸(长×宽×高) Overall dimension(L*W*H)	mm	2360*2300*3580 3860*2450*3580	2800*270*3870 5000*3200*3870	3200*2800*4000 5400*3400*4000	3600*2850*4200 5600*3350*4000	3900*2950*4200 5900*3500*4200
机床重量(约) Machine weight(Appro.)	t	9/10.5	12/13.5	17/18.5	19/21	21/23

CK5225×H/20 CK5232×H/20
CK5240×H/20 CK5240×H/32
CK5250×H/40 CK5250×H/65

CNC Vertical Lathe Machine
数控立车



SPECIFICATIONS	Units	CK5225 ×H/20	CK5232 ×H/20	CK5240 ×H/20	CK5240 ×H/32	CK5250 ×H/40	CK5250 ×H/65
最大车削直径 Max.turning diameter	mm	2500	3200	4000	4000	5000	5000
工作台直径 Table diameter	mm	2250	2500	2830	3200	4000	4500
最大工件高度 Max.height of workpiece	mm	1600/2000	1600/2000	2000/2500	2000/2500	2500/3150	2500/3150
最大工件重量 Max.weight of workpiece	t	20	20	20	32	40	65
工作台最大扭矩 Max.torque of table	kn.m	63	63	63	70	80	100
工作台转速范围 Spindle speed range	r/min	2-63	2-63	2-63	0.42-42	0.42-42	0.42-42
垂直刀架最大切削力 Max. cutting force of vertical tool holder	kn	30	35	35	40	50	60
刀架进给量范围 Range of tool feed	mm/min	0.2-145	0.2-145	0.2-145	0.2-145	0.2-145	0.2-145
垂直刀架水平行程 Horizontal travel of vertical tool holder	mm	1400	1750	2150	2150	2765	2765
垂直刀架滑枕行程 Vertical tool holder slide travel	mm	1000	1250	1250	1250	1250/1600	1250/1600
刀架快速移动速度 Tool holder rapid traverse	mm/min	3500	3500	3500	3500	3500	3500
刀具尺寸 Tool shank size	mm	40*50	40*50	40*50	50*50	50*50	50*50
主电机功率 Main motor power	kw	55	55	55	75	75	90
外形尺寸(长×宽×高) Overall dimension(L*W*H)	cm	540*470*480/520	610*480*520/570	690*510*640/690	690*550*640/690	1000*650*710/840	1000*700*723/853
机床重量(约) Weight(about)	t	34/36	38/40	44/46	51/52	64/66	81/84

CNC VERTICAL LATHE MACHINE

CK5263×H/65 CK5263×H/80
CK5280×H/100 CK5280×H/150
CK52100×H/200 CK52100×H/250

CNC Vertical Lathe Machine
数控立车



Units	CK5263 ×H/65	CK5263 ×H/80	CK5280 ×H/100	CK5280 ×H/150	CK52100 ×H/200	CK52100 ×H/250
mm	6300	6300	8000	8000	10000	10000
mm	5700	5700	7100	7100	8000	8000
mm	3150/3500	3150/4000	4000/4500	4000/4500	4000/4500	4000/4500
t	65	80	100	150	200	250
KN.m	250	250	460	460	540	640
r/min	0.42-42	0.42-42	0.16-16	0.16-16	0.16-16	0.16-16
KN	63	63	80	80	100	120
mm/min	0.1-500	0.1-500	0.1-500	0.1-500	0.1-500	0.1-500
mm	3400	3400	4400	4400	5400	5400
mm	1600/1800	1600/2000	2000/2250	2000/2250	2000/2250	2000/2250
mm/min	3500	3500	4000	4000	4000	4000
mm	50*50	50*50	60*60	60*60	80*80	80*80
KW	90	90	110	132	132	132
cm	1150*790*853/933	1250*750*940/1070	1730*900*1260/1310	1730*900*1260/1310	1960*1010*1260/1310	1960*1010*1260/1310
t	104/108	130/135	190/195	245/250	315/325	380/390